



Date
Quote #
Project Name
Type



ERA - Post Top

Description:

Featuring a flat disc hood and louvered optical assembly. Flat disc sits at the top of the fixture housing. All external hardware is made of stainless-steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
ERA	60W LED (Max)	7800	3000K	UNV 120-277V
	150 HPS		3500K	HLV 347-480V
	175 MH		4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
PT3 Post top slips over 3" dia pole	CPL Clear polycarbonate lens (Std)	TY5 Type V (Std)	SD Step dimming	Standard
			MS Motion sensor	BL Black
PT4 Post top slips over 4" dia pole	CG Clear glass lens	TY3 Type III	PC Button photocell	WH White
			SF Single fuse	SG Silver Grey
WM Wall mount			TCO Trespass cut off	
			TP Tamperproof hardware	Custom
			TS Tamperproof screws	CC Custom Color
			DR Decorative rings (exterior)	See website for custom colors. Contact factory for physical samples.
			LVR Internal louvers	

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

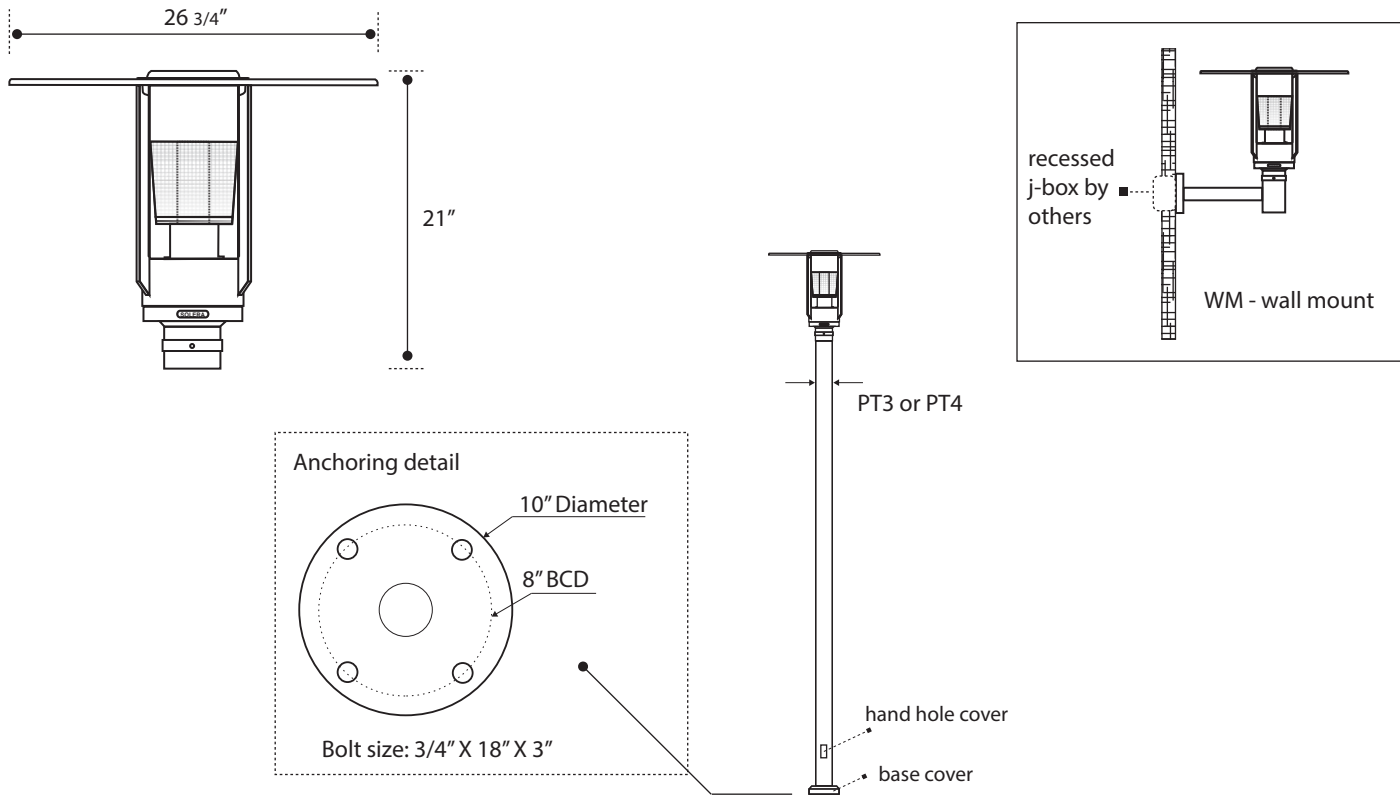

Listing:

Complies to CSA and UL standards.

Polar Graph:

