

Date:

Type:

Project:



ESHA PENDANT

Extruded driver housing with an illuminated neck and spun aluminum dome. Downlight open bottom is the standard. Contact factory for varying color finishes.

Name	Size	Lamping	Lumens*	Color Temp	Electrical	Mounting
ESHA	16	18W	2937	3000K	UNV 120-277V	P36-CMB 36" sturdy stem from ballast canopy
				3500K	HLV 347-480V	AC48-CMB 48" aircraft cable from ballast canopy
				4000K		
				5000K		
Contact for custom						

Lens	Light Pattern	Options	Finishes
OB	Open bottom (Std)	D	Down light with 10% up light (Std)
CPL	Clear lens	DM	0-10V Dimming
OPL	Opal lens	RB	Remote driver
FL	Frosted lens	SV	Swivel Canopy
FM	Frosted lens, middle		
			BL Black
			BZ Bronze
			WH White
			SG Silver Grey
			BA4 Brushed Aluminum #4
			CC Custom Color
Contact factory for varying finishes. See finishes info on website			


*Lumens are based on Wattage, Type V Distribution, and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

ESHA- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

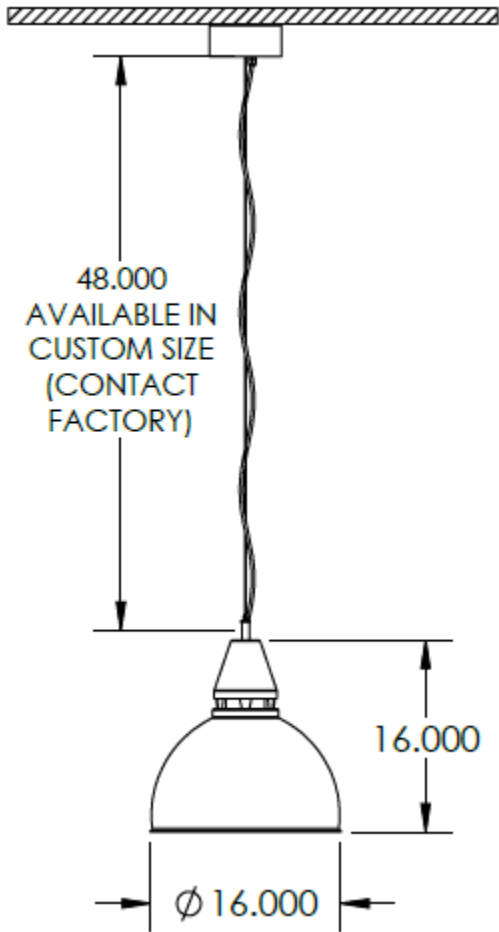


LED DRIVER HOUSING



MOUNTING OPTIONS:

AVAILABLE IN
VARYING FINISHES
(CONTACT
FACTORY)

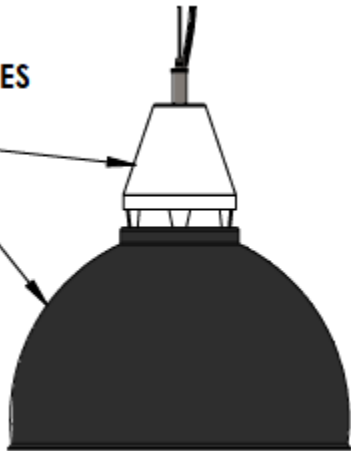

ESHA-AC



ESHA-P