

Date:
Type:
Project:



EXIT SIGN - BOLLARD

Constructed of aluminum, swappable metal composite panels. Silicone sealed gasketing for weather protection. One-sided green downlight EXIT SIGN with open framework is the standard. The EXIT SIGN font size is standard. Bollard height, lens color, sign cut-outs, panel engraving, & color finish are customizable. Contact Solera.

Name	Lamping		Lumens*	Color Temp	Electrical		Mounting	
EXIT SIGN BLD	12W	LED	1057 lumens	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
				4000K	HLV	347-480V		
				5000K				
	Contact for other wattages		Contact for custom outputs	Specify other				

Lens		Light Pattern		Options		Finishes	
RE	Red EXIT SIGN	TY5	TYPE V (Std)	TP	Tamperproof Hardware	BL	Black
BE	Blue EXIT SIGN	TY4	TYPE 4 (for BC)	TS	Tamperproof Screwdriver	WH	White
CAL	Clear Acrylic Lens (Std)			2SE	2-sided EXIT SIGN	SG	Silver Grey
				BC	Downlight with Back Cover	BZ	Bronze
				ENG	Engraving at bottom panel	CC	Custom Color
Contact for other lens colors & cut-outs		Contact for other light pattern			Contact for other options	See finishes info on website	


*Lumens are based on Max Wattage & 5000K CCT
Std – Standard Offering

EXIT SIGN- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

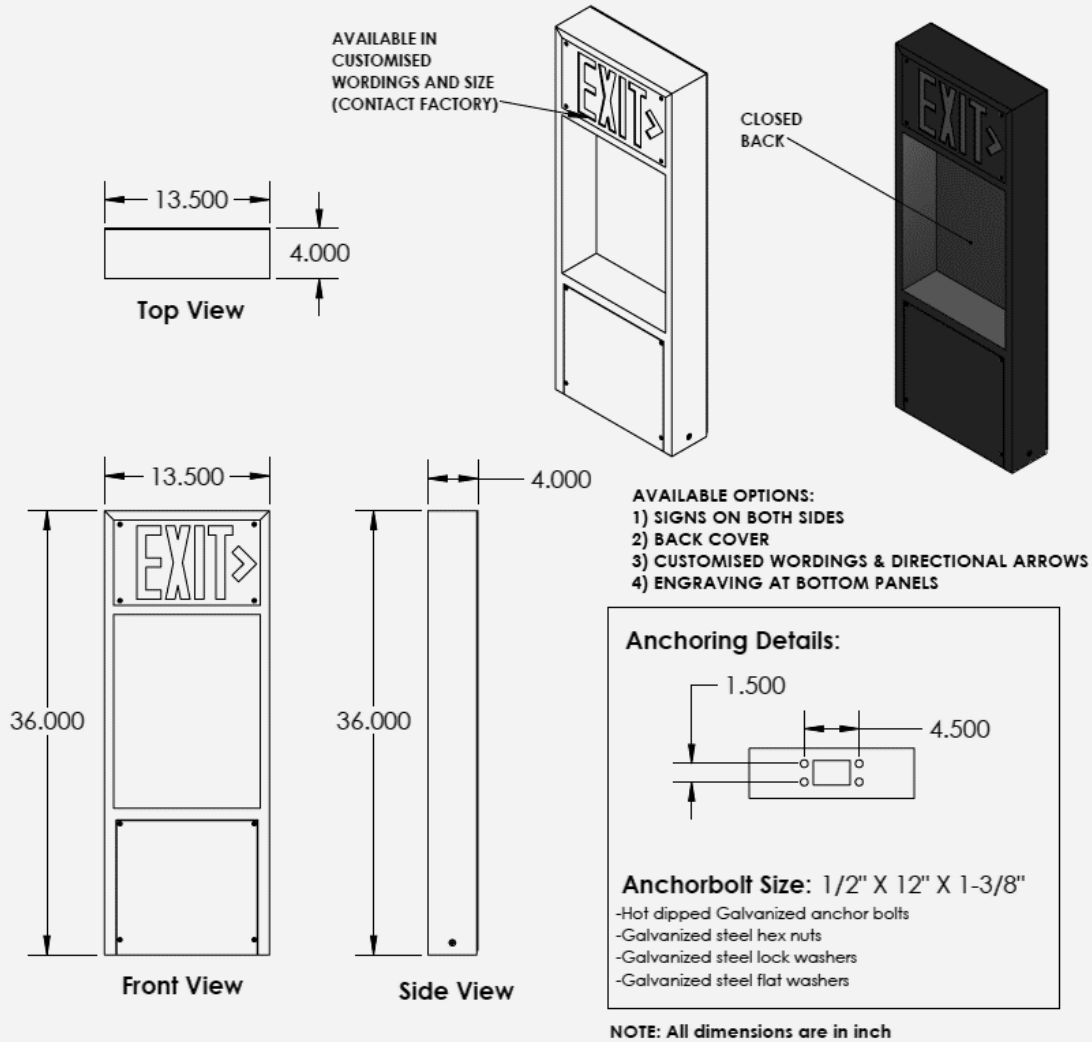

Polar Graph

