



Date
Quote #
Project Name
Type



FION - Bollard

Description:

Round flat top bollard constructed of extruded aluminum. Features a sleek lens profile for modern spaces. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
FION	18 LED (Max)	2711	2700K	UNV 120-277V
			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts and template	CAL	Clear acrylic lens	TY5	Type V (Std)	MS	Motion sensor	Standard	
		OAL	Opal acrylic lens	180	180 degrees	SD	Step dimming	BL	Black
						TP	Tamperproof hardware	WH	White
						TS	Tamperproof screws	SG	Silver Grey
						PC	Button photocell	BZ	Bronze
								Custom	
						GFR	Ground fault receptacle	CC	Custom Color
						SF	Single fuse	See website for custom colors. Contact factory for physical samples.	


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

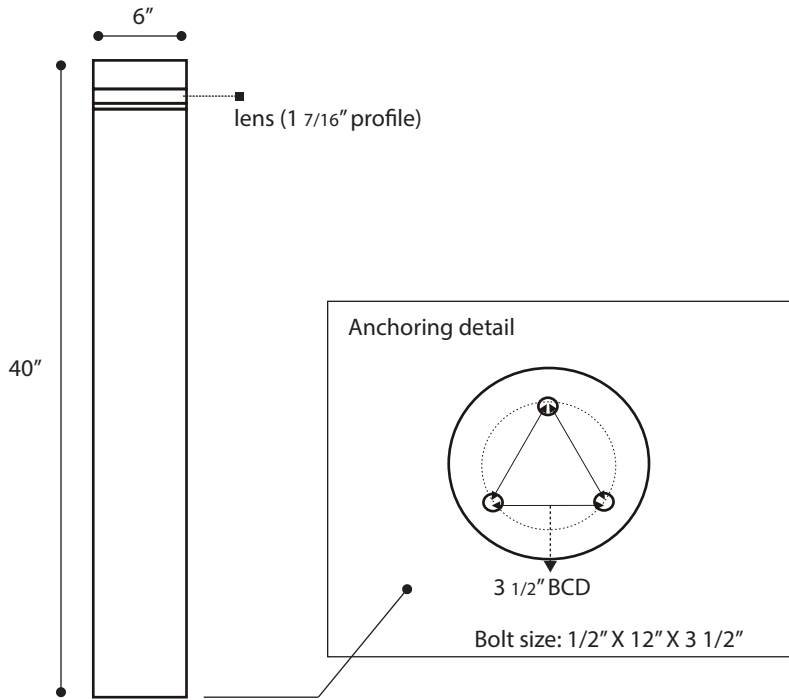

Listing:

Complies to CSA and UL standards.

Polar Graph:

