




|              |
|--------------|
| Date         |
| Quote #      |
| Project Name |
| Type         |

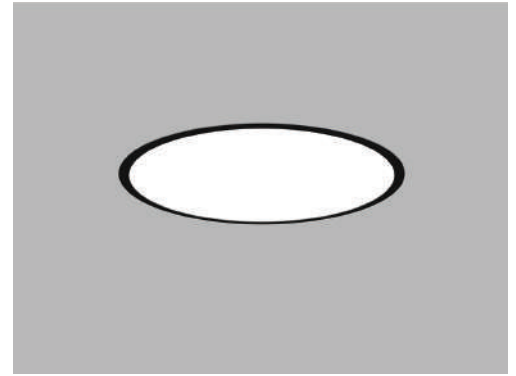

## FLU - Ceiling Recessed

### Description:

Lens is held with an extruded aluminum door frame.  
 Torsion springs secure the door to fixture housing. All external hardware is stainless-steel.

|                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Name                 | Engine               | Lumens               | CCT                  | Electrical           | Mounting             | Lens                 | Pattern              | Options              | Finish               |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

| Name   | Light Engine | Source Lumens <sub>(LED)(5000K)</sub> | Color Temp | Electrical   |
|--------|--------------|---------------------------------------|------------|--------------|
| FLU-12 | 12 LED (Max) | 2112                                  | 2700K      | UNV 120-277V |
| FLU-24 | 24 LED (Max) | 4224                                  | 3000K      | HLV 347-480V |
| FLU-36 | 36 LED (Max) | 6336                                  | 3500K      |              |
| FLU-48 | 48 LED (Max) | 8448                                  | 4000K      |              |
| FLU-60 | 60 LED (Max) | 10560                                 | 5000K      |              |
| FLU-72 | 72 LED (Max) | 12672                                 |            |              |

Contact for custom

Contact for custom

Contact for custom

| Mounting                        | Lens                                 | Light Pattern   | Options             | Finishes  |
|---------------------------------|--------------------------------------|-----------------|---------------------|---|
| R<br>Recessed in solid ceiling  | FOAL<br>Flat opal acrylic lens (Std) | D<br>Down light | DM<br>0-10V dimming | Standard<br>BL Black  |
| RT<br>Recessed in T-bar ceiling | COAL<br>Concave opal acrylic lens    |                 | DM1<br>1% dimming   | WH White  |
|                                 | CXAL<br>Convex opal acrylic lens     |                 | SF<br>Single fuse   | SG Silver Grey<br>BZ Bronze   |
|                                 |                                      |                 |                     | Custom<br>CC Custom Color   |
|                                 |                                      |                 |                     | See website for custom colors.<br>Contact factory for physical samples. |

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering








**Dimensions & Mounting:**

Please note that drawings are not to scale.

**Side view**

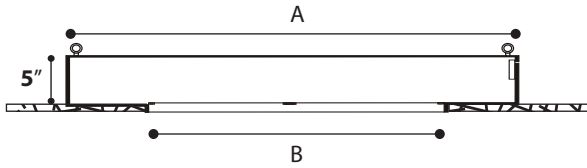

|        | A   | B       |
|--------|-----|---------|
| FLU-12 | 12" | 11 1/2" |
| FLU-18 | 18" | 17 1/2" |
| FLU-24 | 24" | 23 1/2" |
| FLU-36 | 36" | 35"     |
| FLU-48 | 48" | 46 3/4" |
| FLU-60 | 60" | 58 3/4" |
| FLU-72 | 72" | 70 3/4" |

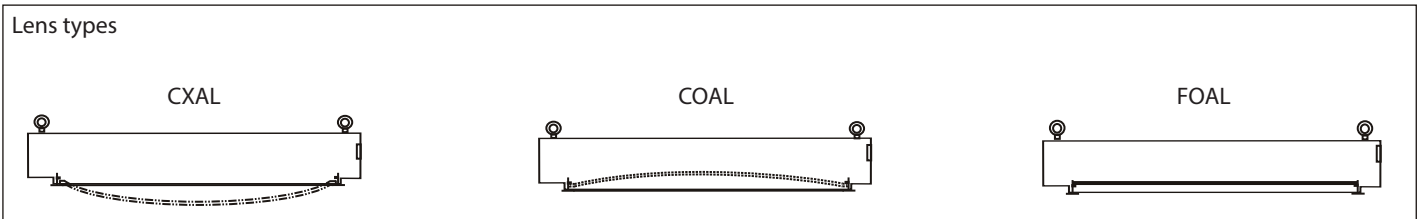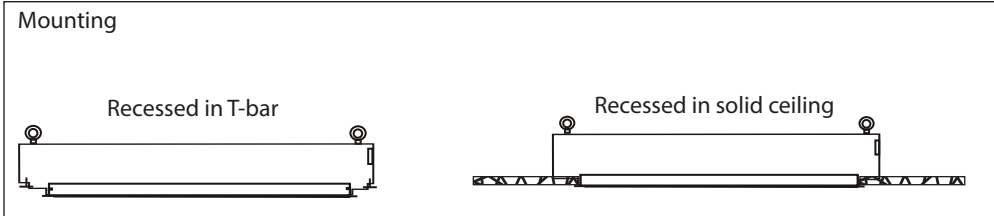

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

