



| |
|--------------|
| Date |
| Quote # |
| Project Name |
| Type |



GAR-B - Bollard

Description:

Extruded aluminum housing construction with aluminum end caps and silicone sealed lens gasketing.

| | | | | | | | | | |
|------|--------|--------|-----|------------|----------|------|---------|---------|--------|
| Name | Engine | Lumens | CCT | Electrical | Mounting | Lens | Pattern | Options | Finish |
| | | | | | | | | | |

| Name | Light Engine | Source Lumens _{(LED)(5000K)} | Color Temp | Electrical |
|-------|--------------|---------------------------------------|------------|--------------|
| GAR-B | 42 LED (Max) | 5460 | 3000K | UNV 120-277V |
| | | | 3500K | HLV 347-480V |
| | | | 4000K | |
| | | | 5000K | |

Contact for custom

Contact for custom

Contact for custom

| Mounting | | Lens | | Light Pattern | | Options | | Finishes | |
|----------|-----------------------------|------|--------------------------------|---------------|--|---------|----------------------|----------|-------|
| ABT | Anchors, bolts and template | CPL | Clear polycarbonate lens (Std) | FT | Forward throw | MS | Motion sensor | Black | |
| | | PR | Prismatic lens (K12) | 180 | 180 degrees | SD | Step dimming | BL | Black |
| | | | | | | TP | Tamperproof hardware | WH | White |
| | | LE | Lexan (vandal resistant) | TS | Tamperproof screws | SG | Silver Grey | | |
| | | | | PC | Button photocell | BZ | Bronze | | |
| | | SF | Single fuse | | | | | | |
| | | GFR | Ground fault receptacle | Custom | | | | | |
| | | ELB | Electronic HID ballast | CC | Custom Color | | | | |
| | | BC | Base cover | | See website for custom colors. Contact factory for physical samples. | | | | |
| | | | | | | | | | |

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.


Side view

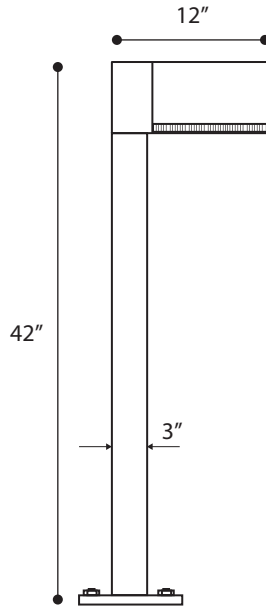

Front view

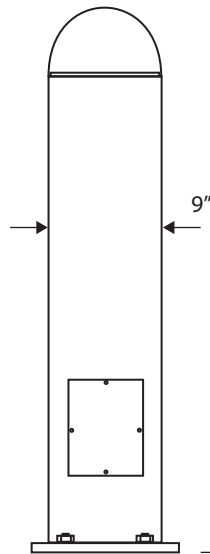

Anchoring detail

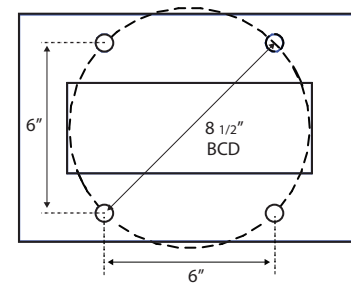

BOLT SIZE: 1/2" X 12" X 1 3/8"

Listing:

Complies to CSA and UL standards.

Polar Graph:

FT

