




Date
Quote #
Project Name
Type

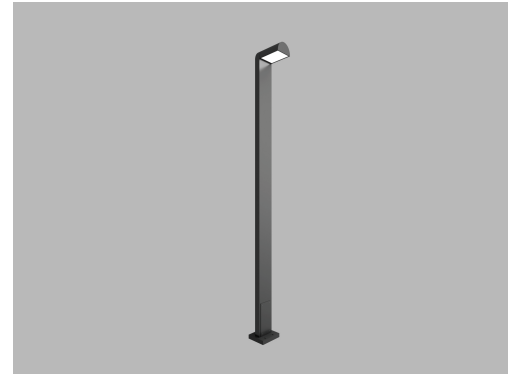

GAR-C - Light Column

Description:

Extruded aluminum housing construction with aluminum end caps and a gasketed silicone sealed lens.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GAR-C	42 LED (Max)	5460	3000K	UNV 120-277V
	150 MH		3500K	HLV 347-480V
			4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom Contact for custom Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes			
ABT Anchors, bolts and template	CG Clear glass lens (Std)	FT Forward throw	LE Lexan (vandal resistant)	SD Step dimming	MS Motion sensor	TP Tamperproof hardware	TS Tamperproof screws	Standard			
								BL	Black		
	WH	White									
	SG	Silver Grey									
				PC Button photocell	SF Single fuse	GFR Ground fault receptacle	ELB Electronic HID ballast	BC Base cover	TCO Trespass cut off		
										BZ	Bronze
										Custom	
										CC	Custom Color
See website for custom colors. Contact factory for physical samples.											


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

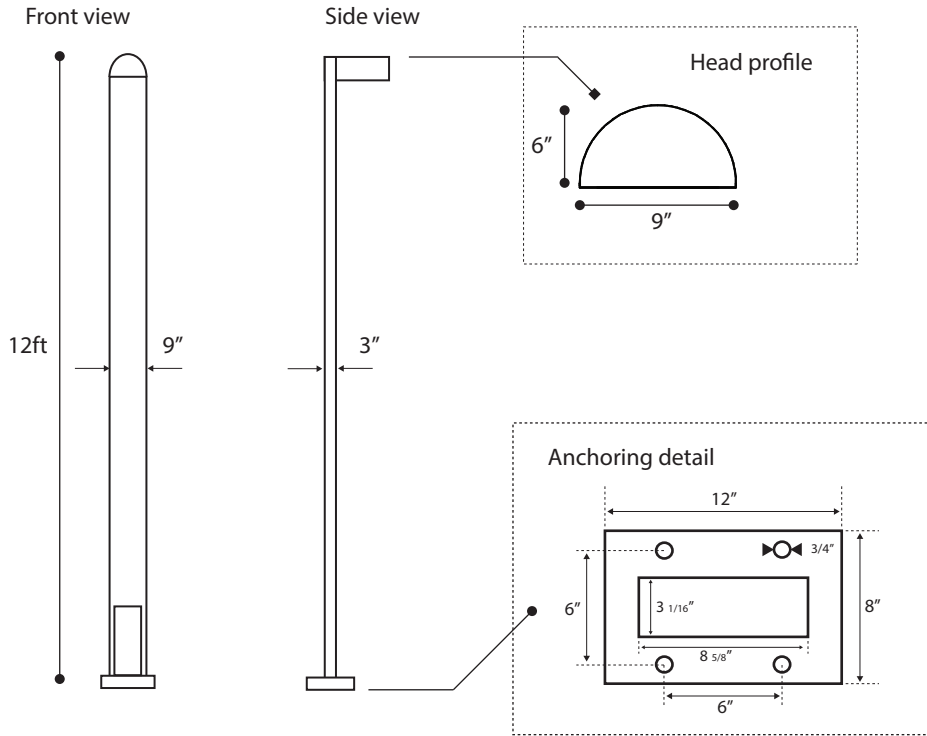

Listing:

Complies to CSA and UL standards.

Polar Graph:

