




Date
Quote #
Project Name
Type

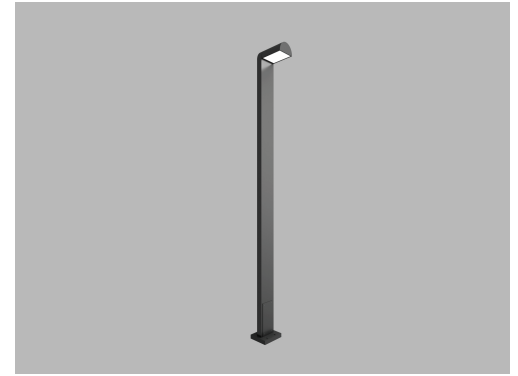

GAR-C - Light Column

Description:

Extruded aluminum housing construction with aluminum end caps and a gasketed silicone sealed lens.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GAR-C	42 LED (Max)	5460	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
ABT		CPL		FT		SD		Standard	
Anchors, bolts and template		Clear polycarbonate lens (Std)		Forward throw		Step dimming		BL	
		PR				MS		White	
		Prismatic lens (K12)				TP		Silver Grey	
		LE				TS		Bronze	
		Lexan (vandal resistant)				Trespass cut off			
						PC			
						SF		Custom	
						GFR		CC	
						ELB		See website for custom colors. Contact factory for physical samples.	
						BC			
						TCO			

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering

Since product development is an on-going process, Solera reserves the right to change the information on this spec sheet.


Date Modified: 07-02-2025





Dimensions & Mounting:

Please note that drawings are not to scale.

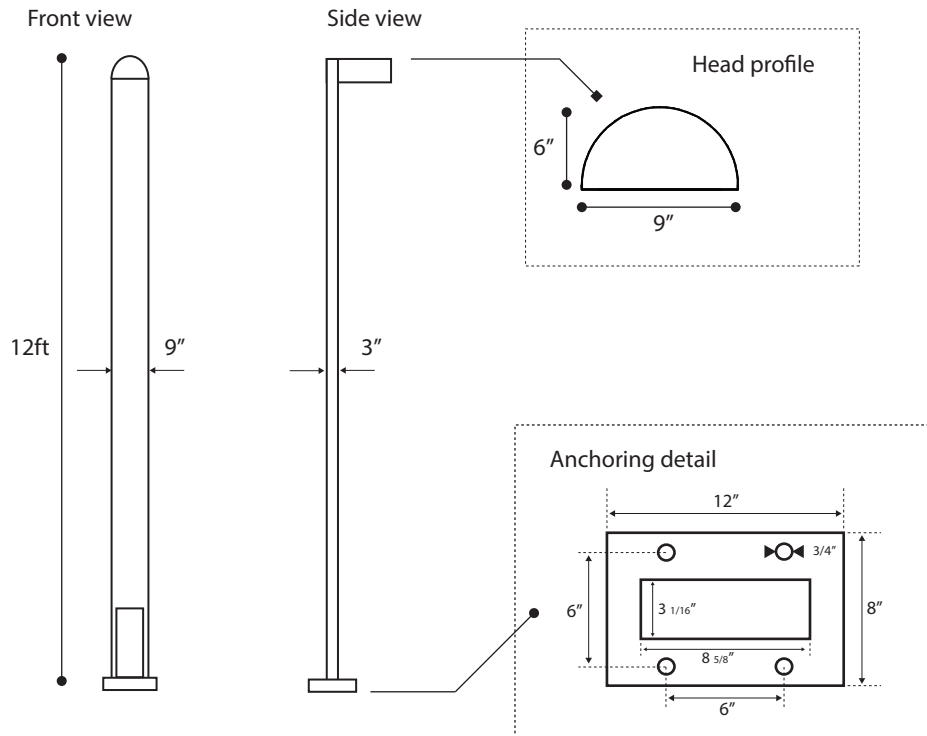

Listing:

Complies to CSA and UL standards.

Polar Graph:

