



Date
Quote #
Project Name
Type



GM-Bollard

Description:

The GM-Bollard is suitable for use in entrance ways and can be customized to include provisions for intercom, card reader and handi cap button. Solera only provides the cut out: specs for intercom, card reader and handi cap button by others.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GM-Bollard	20 LED (Max)	2694	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchors, bolts and template	CPL Clear polycarbonate lens (Std)	D Down light	MS Motion sensor	Standard
			SD Step dimming	BL Black
			COM Intercom (cut out only)	WH White
			HPB Handicap push button (cut out only)	SG Silver Grey
			CR Card reader (cut out only)	BZ Bronze
				Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

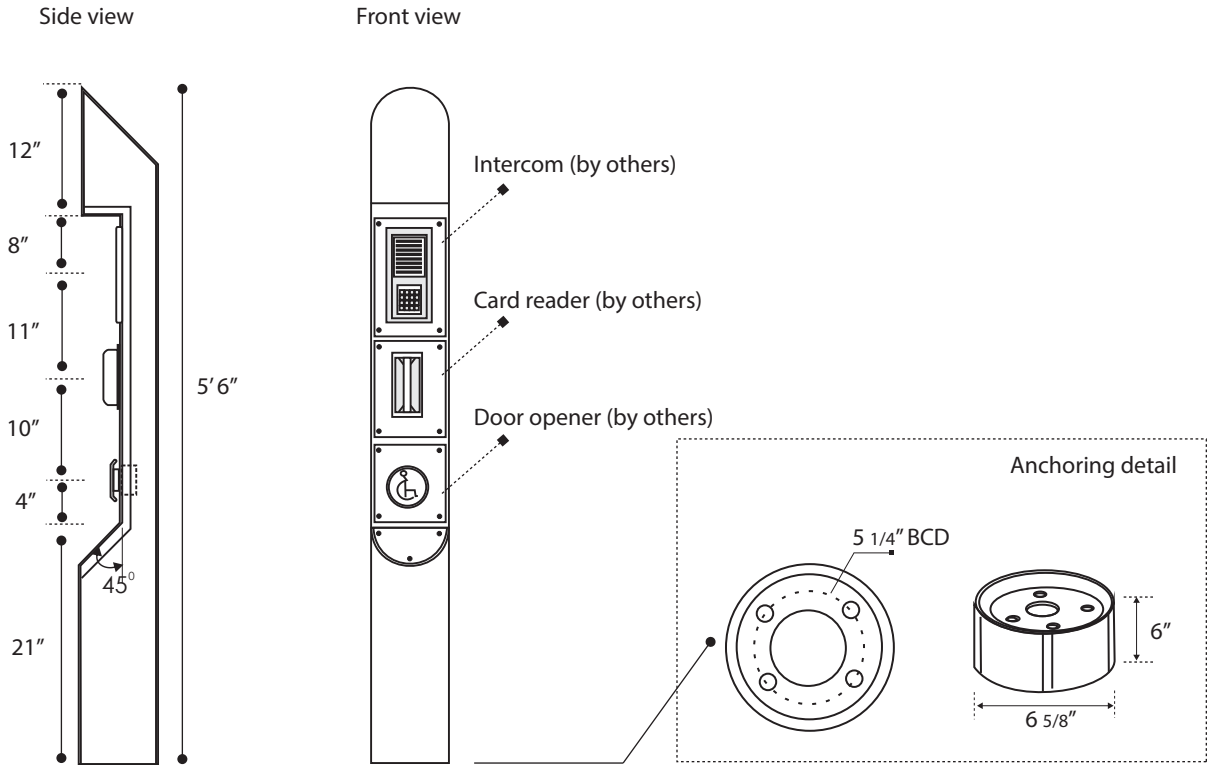

Listing:

Complies to CSA and UL standards.

Polar Graph:

