

Date: _____

Type: _____

Project: _____

GRANT BOLLARD

Presenting the Grant Bollard! With a slanting top and a modern 3-strip face cut-out, this bollard seamlessly blend into your outdoor landscape during the day. By night, its specialized optics casts a subtle illumination, jazzing up walkways with futuristic elegance.

Construction: Discover the innovative charm of our 39-inch standard bollard crafted from durable 6061-T6 aluminum structured with 60-degree slant at the top. Its precise 3-vertical cut-out strips give a captivating visual appeal. Whether lining pathways or accentuating garden features, this bollard seals the deal.

Mounting: The fixture attaches securely to the ground and anchoring plate using four flush-mounted anchor bolts. The package includes the necessary anchors (A), bolts (B), and a template (T).

Lens: Our standard opal lens gently diffuses light creating a soft inviting ambiance.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: The soft glow on both sides gives a soothing appeal.

Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, 0-10v dimming, ground fault receptacle, button photocell (voltage specific)


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty




GRANT:

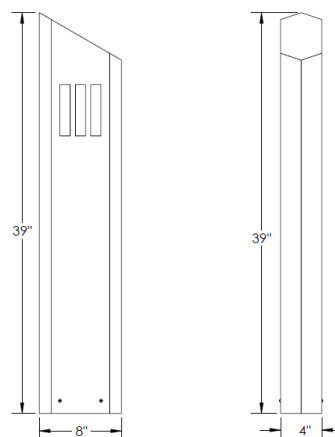

FRONT VIEW

SIDE VIEW

Anchoring Details:



Anchorbolt Size: 3/8" X 8" X 1"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers

--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Color Temperature	Mounting	Lens	Light Pattern	Options	Finish
GRANT	39"	30W	UNV	3000K	ABT	OPL	SOFT	TP	BL
			HLV	3500K				TS	BZ
				4000K				DM	WH
				5000K				GFR	SG
								PC	CC
Custom wattage and size available									

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- HLV – 347V line voltage
- ABT – Anchor, bolts, & template
- OPL – Opal lens (std)
- SOFT – Soft glow on both sides
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- GFR – Ground fault receptacle
- PC – Button photocell (voltage specific)
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)