



Date
Quote #
Project Name
Type



GROOVE - Bollard

Description:

Housing constructed of fabricated aluminum. Central front fascia has indentation with concealed lens to prevent an up light. Standard lens is clear acrylic. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GROOVE	24W LED (Max)	3516	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts & template	CAL	Clear acrylic lens (Std)	FT	Forward throw (Std)	MS	Motion sensor	Standard	
		OAL	Opal acrylic lens			SD	Step dimming	BL	Black
						TP	Tamperproof hardware	WH	White
						TS	Tamperproof screws	SG	Silver Grey
						PC	Button photocell	BZ	Bronze
								Custom	
						SF	Single fuse	CC	Custom Color
						GFR	Ground fault receptacle		See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

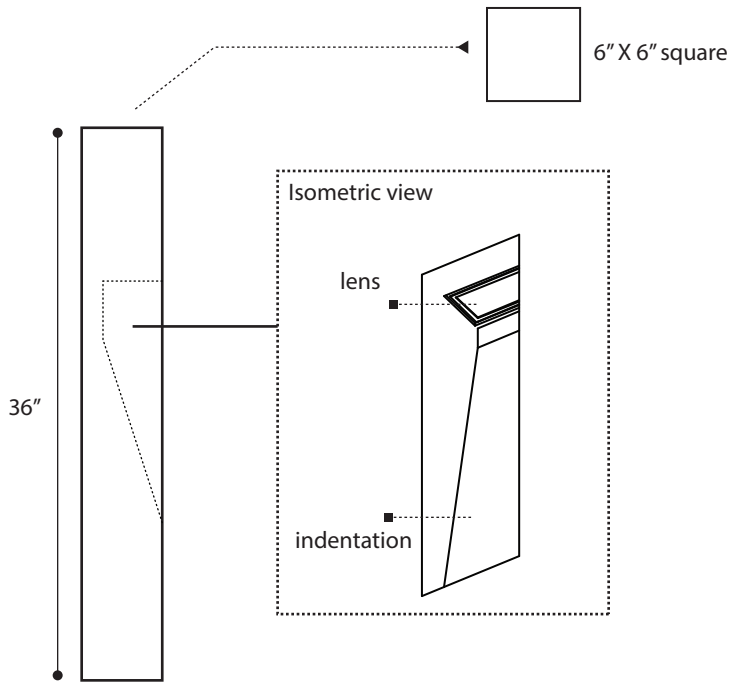

Listing:

Complies to CSA and UL standards.

Polar Graph:

