



Date
Quote #
Project Name
Type



GRW - Bollard

Description:

GRW is a bollard that sits low to the ground adding a unique effect to pathways. Available as a flat or dome top design.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
GRW	42 LED (Max)	5446	3000K	UNV 120-277V
	175 MH		3500K	HLV 347-480V
	PLT42		4000K	TT Tri-Tap(HID)
	18 LPS		5000K	MT Multi-Tap(HID)
	2PLT42			
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchors, bolts and template	OPL Opal polycarbonate lens (Std)	TY5 Type V(Std)	EM Emergency battery	Standard
	CPL Clear polycarbonate lens (Std)	180 180 degrees	ELB Electronic ballast (HID)	BL Black
			DOT Dome top	WH White
			FLT Flat top	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			TP Tamperproof hardware	Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

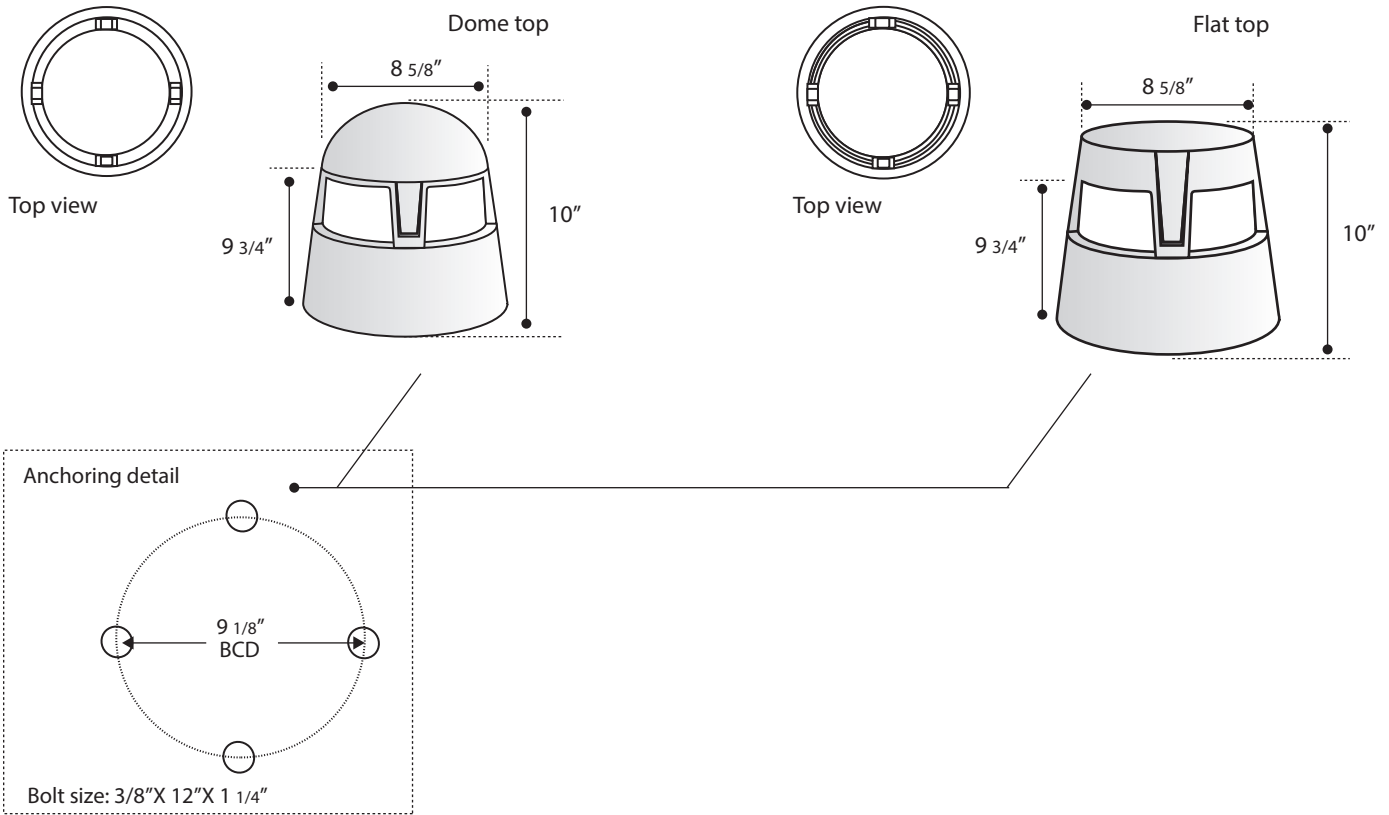

Listing:

Complies to CSA and UL standards.

Polar Graph:

