



Date
Quote #
Project Name
Type



HO- Wall Mount

Description:

A sign light made of extruded aluminum, where the lamping module is adjustable.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
HO	24" 24 LED (Max)	3518	3000K	UNV 120-277V
	36" 36 LED (Max)	5277	3500K	HLV 347-480V
	48" 48 LED (Max)	7040		
	60" 60 LED (Max)	8796	4000K	
	72" 72 LED (Max)	10560	5000K	
	84" 84 LED (Max)	12314		
	96" 96 LED (Max)	14073		

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	CPL Clear polycarbonate lens (Std)	D Down light (Std)	DM 0-10V dimming	Standard BL Black
RM Roof mount			WL Wet location	WH White
			TP Tamperproof hardware	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			ADJ Adjustable housing	Custom CC Custom Color
			EM Emergency battery	See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

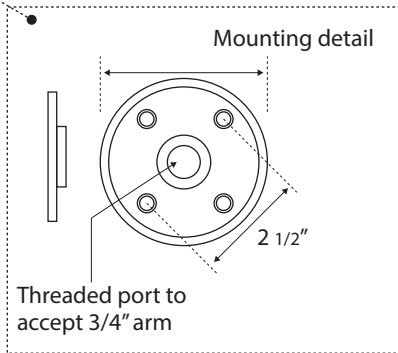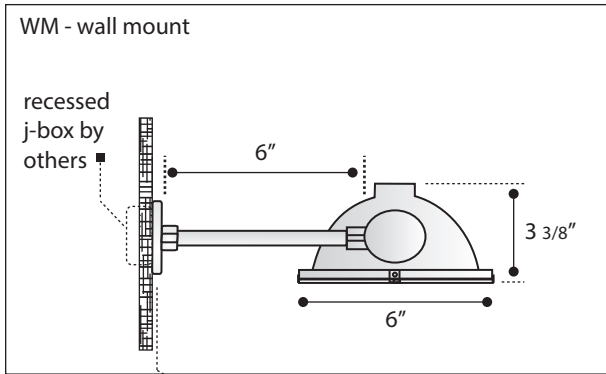

48" or 72"
 Contact for other sizes

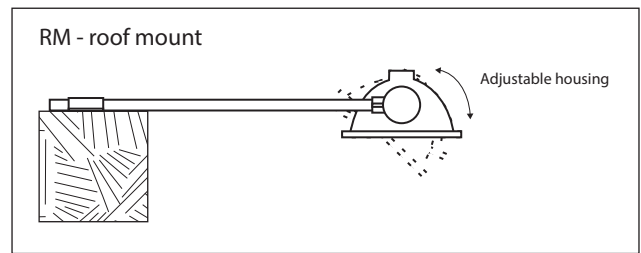

Listing:

Complies to CSA and UL standards.

Polar Graph:

