



Date
Quote #
Project Name
Type



ICON - Bollard

Description:

Constructed of pre-cast concrete, where the top cap is removable for easy lamp maintenance.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
ICON	48 LED (Max)	6240	3000K	UNV 120-277V
	100 MH		3500K	HLV 347-480V
	100 HPS		4000K	TT Tri-Tap(HID)
	18 LPS		5000K	MT Multi-Tap(HID)
	2PLT42			
	<i>Contact for custom</i>	<i>Contact for custom</i>	<i>Contact for custom</i>	

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchor, bolts & template	OAL Opal acrylic lens (Std)	TY5 Type V (Std)	TP Tamperproof hardware	CONC Concrete
	CAL Clear acrylic lens	180 180 degrees	TS Tamperproof screws	Select finish for frame around lens. BL - Black WH - White SG - Silver Grey BZ - Bronze
			PC Button photocell	CC - Custom colors available (see website)
			SF Single fuse	


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

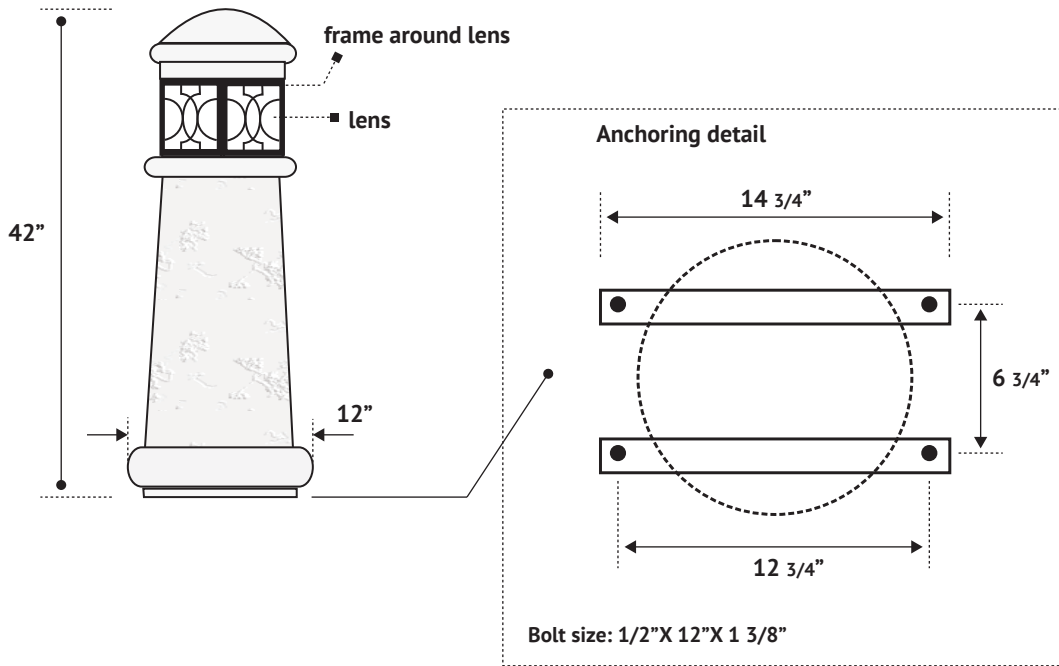

Listing:

Complies to CSA and UL standards.

Polar Graph:

TY5

