


<b>Date:</b>
<b>Type:</b>
<b>Project:</b>

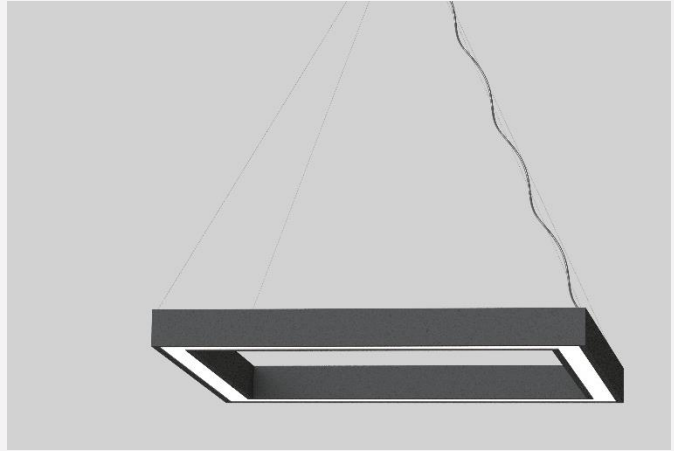

**KEY - PENDANT**

Square pendant with a low-profile, clean look. Standard luminaire depth is 4” with lens at the bottom. Constructed of aluminum extrusion and comes in various sizes. The aircraft cables are adjustable. Pendant stem length is cuttable. Several mounting options to choose from.

Name	Light Engine		Fixture Lumens*	Color Temp	Electrical		Mounting	
KEY	24	24W LED	1,421	3000K	UNV	120-277V	4AC48	four 48” aircraft cables with individual square canopies
	36	36W LED	2,119	4000K	HLV	347-480V	4AC-SPD	four aircraft cables & spider mount connecting to hub
	48	48W LED	2,821	5000K			4AC-TR	four aircraft cables converge to single square canopy
	60	60W LED	3,670	RGBW			4AC-SPD-P	combination of 4 aircraft cables, spider mount, & pendant stem
	72	72W LED	4,243					
	Contact Solera for other wattages			Specify other				Contact Solera for other lengths

Lens		Optics		Options		Finishes	
OAL	Opal Acrylic Lens	D	Down Light (Std)	DM	0-10V Dimming	BL	Black
		UD	Up and Down Light	DM1	1% Dimming	WH	White
				2CC	2 Circuit Wiring	SG	Silver Gray
				SF	Single Fuse	BZ	Bronze
				EM	Emergency Battery	CC	Custom Color
				RB	Remote Ballast/Driver		
Contact Solera for other lens types							<a href="#">See finishes brochure for custom</a>


\*Lumens are based on wattage and 5000K CCT.  
Std - standard

KEY- \_\_\_\_\_


**Customization Notes:**

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Mounting Options (drawings are not to scale):

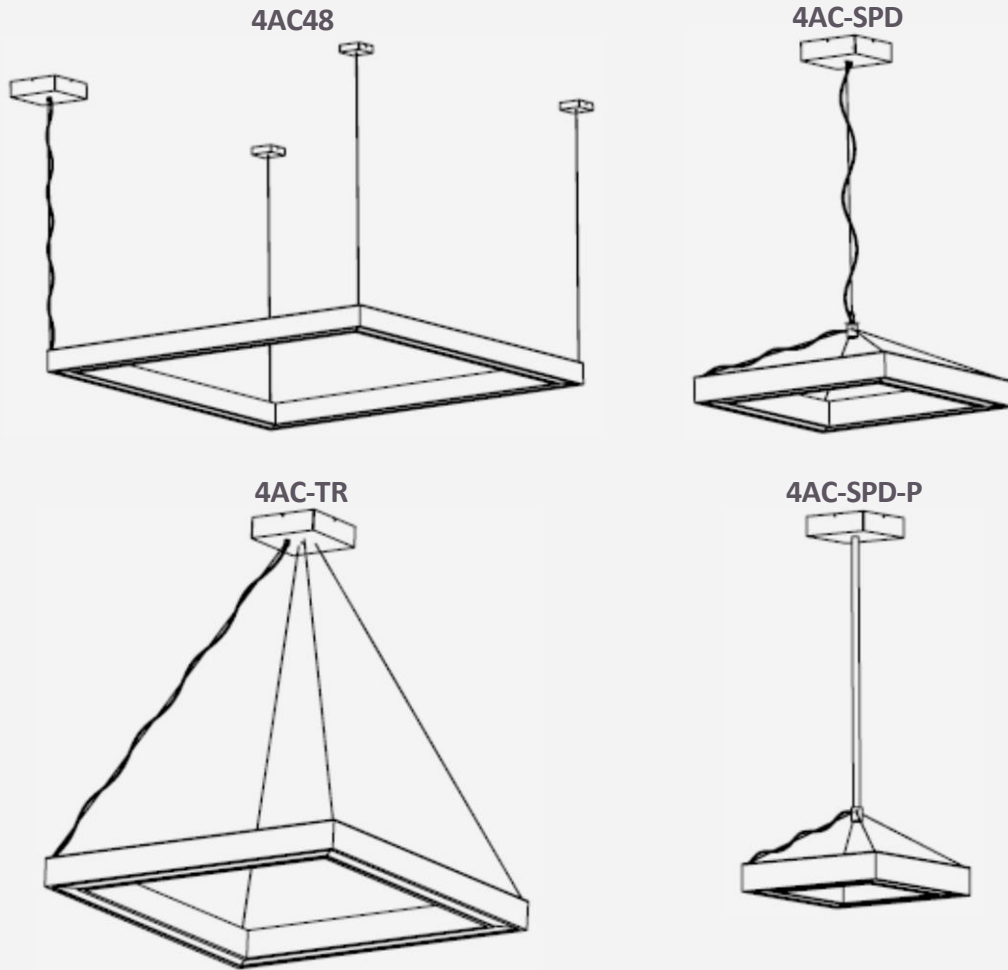

Polar Graph

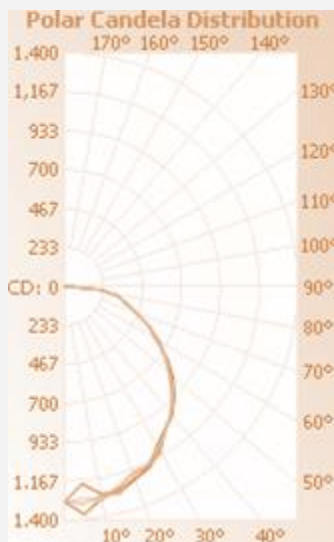

Downlight

Dimensions (in inches & drawings are not to scale):

