



Date
Quote #
Project Name
Type



## MDN - Bollard

### Description:

MDN bollard comes in two forms: one being a rounded top with slotted windows or the other being a louvered head. The shaft is fluted. All external hardware is stainless-steel.

Name  - Engine  - Lumens  - CCT  - Electrical  - Mounting  - Lens  - Pattern  - Options  - Finish

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
MDN	48 LED (Max)	6240	3000K	UNV 120-277V
	70 HPS		3500K	HLV 347-480V
	70 MH	4000K	TT Tri-Tap(HID)	
	2PLT57	5000K	MT Multi-Tap(HID)	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchors, bolts and template	OPL	Opal polycarbonate lens (Std)	SW	Slotted windows, type V	MS	Motion sensor	Bronze	
				LOH	Louvered head, type V	SD	Step dimming	BL	Black
				180	180 degrees	TP	Tamperproof hardware	WH	White
						TS	Tamperproof screws	SG	Silver Grey
						PC	Button photocell	BZ	Bronze
						SF	Single fuse	Custom	
						GFR	Ground fault receptacle	CC	Custom Color
						ELB	Electronic HID ballast		See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

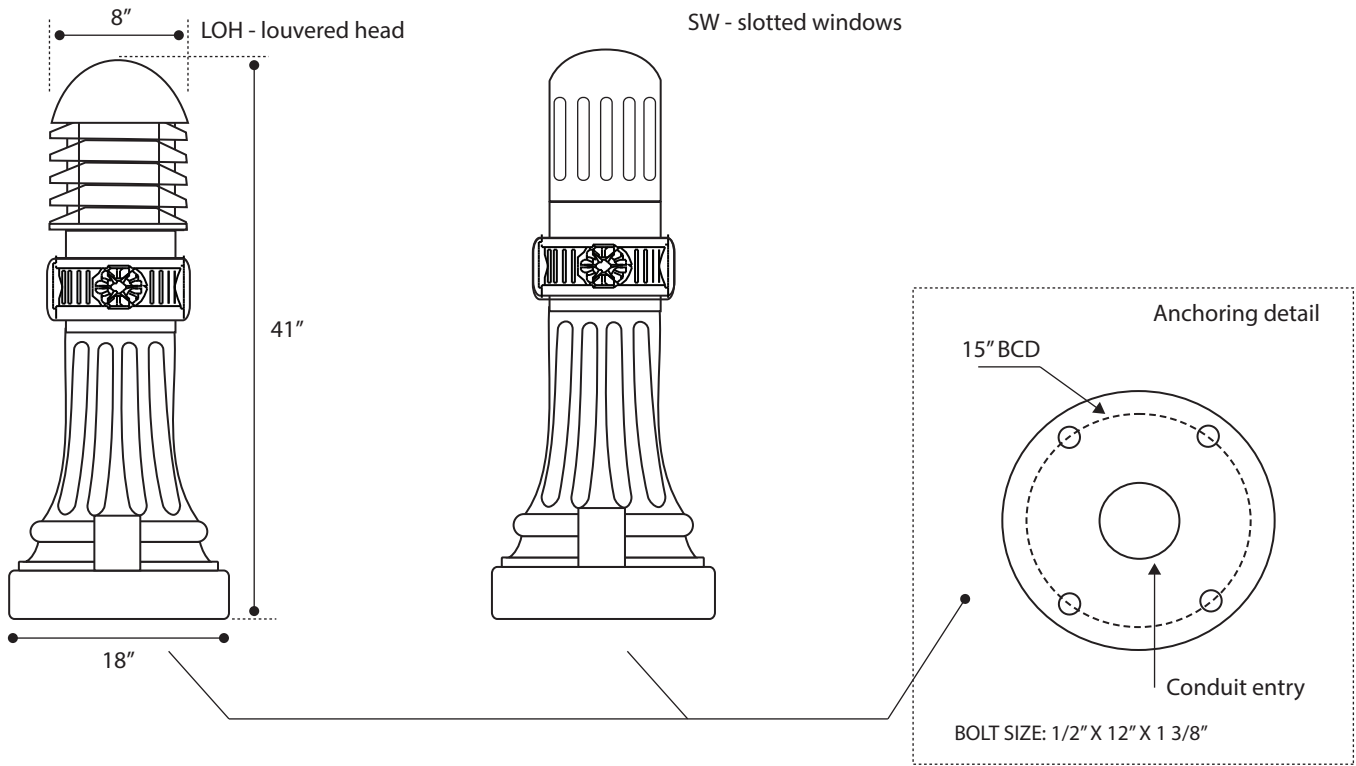

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

