

Date: _____

Type: _____

Project: _____



META PENDANT

A round luminaire constructed from aluminum extrusion. The housing has a 2-tiered solid design. Pattern cut-outs are customizable for the lower tier. Choose from different mounting & specifiable options and finishes.

Name	Lamping			Fixture Lumens*	Color Temp	Electrical			Mounting
META	24	24"	24W LED		5000K	UNV	120-277V	P	Sturdy pendant stem
	36	36"	36W LED		4000K	HLV	347-480V	3AC-TR	3 aircraft cables converge to single canopy
	48	48"	48W LED		3000K			3AC-SPD	3 aircraft cables & spider mount connecting to a hub
	60	60"	60W LED					3AC-SPD-P	Combination of 3 aircraft cables, spider mount, & sturdy pendant stem
							3AC	3 aircraft cables hang from individual canopies	
							3P12	12" sturdy pendant stem hang down from a single canopy	
			Contact Solera for other Wattages	Specify other			Contact Solera for other lengths		

Lens		Optics		Options		Finishes		
OAL	Opal acrylic lens (Std)	D	Down light only (Std)	DM	0-10V Dimming	BL	Black	
FL	Frosted lens	UD	Up & down light	DM1	1% Dimming	WH	White	
K12	Prismatic lens			2CC	Two circuit wiring	SG	Silver Gray	
				RGBW	Color changing LEDs	BZ	Bronze	
				RB	Remote ballast			
				EM	Emergency Battery	BA4	Brushed Aluminum #4	
				PD	Custom pattern design at lower tier only	CC	Custom color	
			Contact Solera for other light distribution	Contact Solera for other custom options			See finishes page for custom colors	




*Contact Solera for lumens & to request for IES files.
Std – standard offering

META- _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


Dimensions & Mounting Options (drawings are not to scale; measurements in inches):

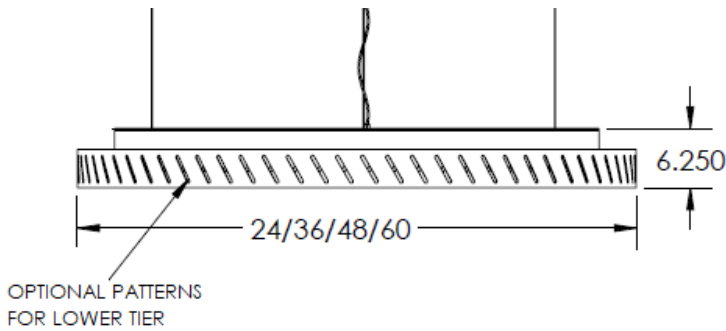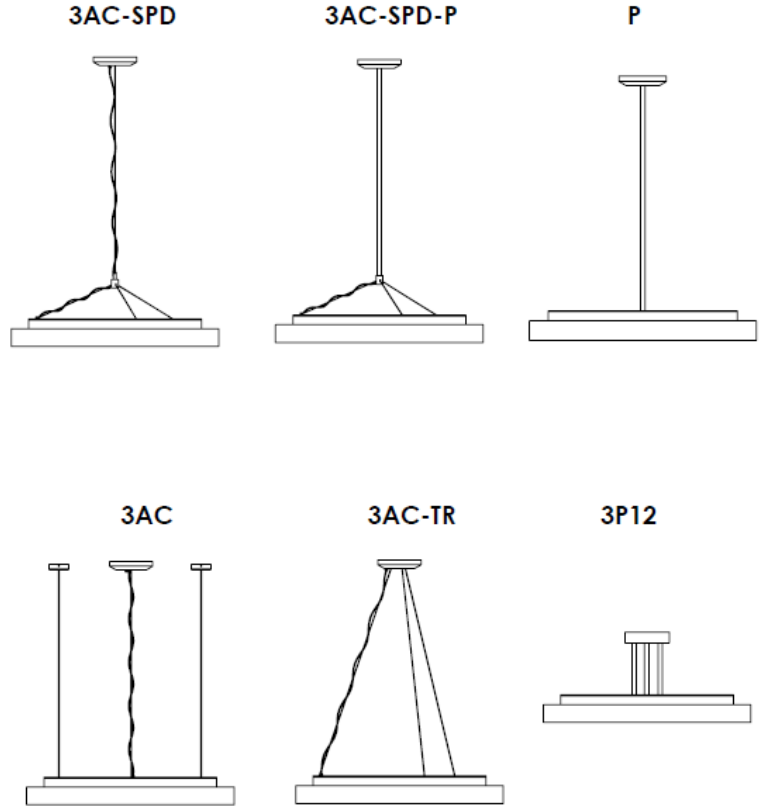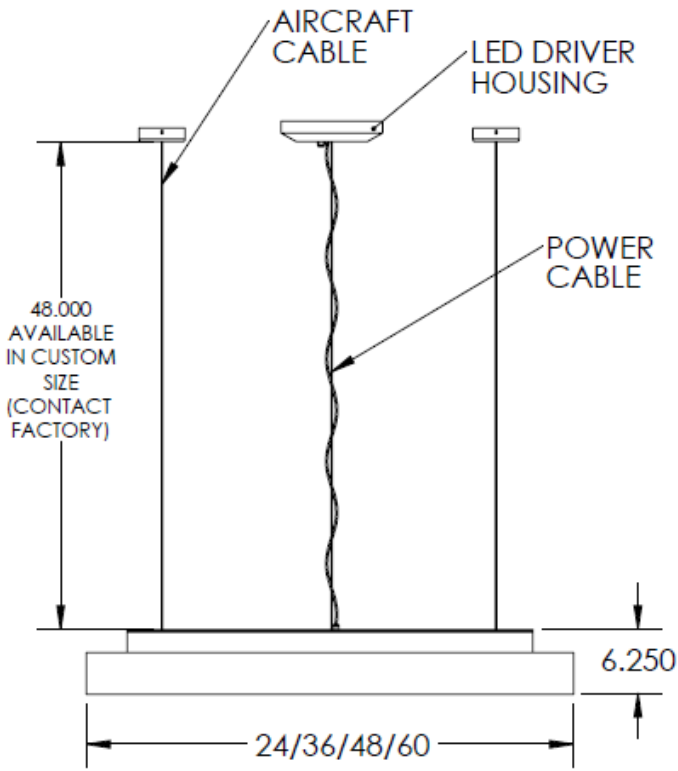

STANDARD PATTERN DESIGN OPTIONS FOR LOWER TIER:

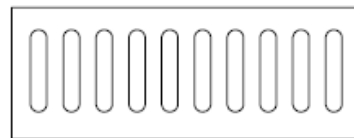

PATTERN: 1

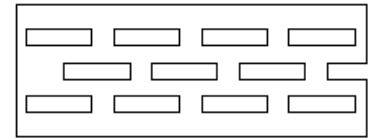

PATTERN: 2



PATTERN: 3

CONTACT FACTORY FOR OTHER AVAILABLE PATTERN OPTIONS