

Date: _____

Type: _____

Project: _____

NEMO LIGHT COLUMN

Slim square light column with a slanting design on the shaft for a futuristic appeal

Construction: Fixture housing constructed from 6061 aluminum alloy. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Aluminum anchoring base mounts to 4 flush-mounted anchor bolts.

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature

Light distribution: Type V


Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD.
Operating temperature ranging between -10 °C to 50 °C .

Options: 0-10V Dimming, 10KV/20KV surge protector, ground fault receptacle, tamperproof hardware, tamperproof bits, color changing LED


Finish: Black, White, Silver Gray, Bronze
(Custom color available upon request)

Listing: Complies with CSA & UL.
Approved for outdoor location.

Warranty: [5-year limited warranty](#)




Anchoring Details:

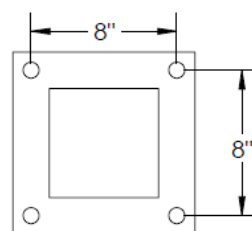

Anchorbolt Size: 3/4" X 18" X 3-3/4"

- Hot dipped Galvanized anchor bolts
- Galvanized steel hex nuts
- Galvanized steel flat washers

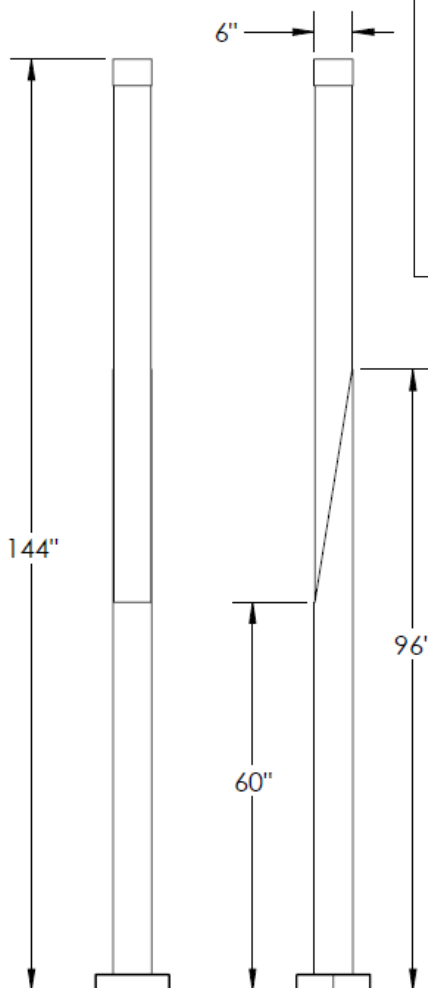

--	--	--	--	--	--	--	--	--	--

Name	Height (inches)	Light Engine	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options		Finish	
NEMO	144	38 W (max)	3000K	UNV	ABT	OPL	TY5	TP	SP10	BL	
			3500K	HLV					TS	SP20	BZ
			4000K						DM	RGBW	WH
			5000K						GFR		SG
Contact factory for custom size											

Notes:

- 3000K – 156 Source lm/w
- 3500K – 159 Source lm/w
- 4000K – 164 Source lm/w
- 5000K – 166 Source lm/w
- UNV – Universal voltage (120V - 277V)
- HLV – 347V line voltage
- ABT – Anchors, bolts, template
- OPL – Opal lens
- TY5 – Type V light distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- DM – 0-10V dimming
- SP10 – Surge protector up to 10 KV
- SP20 – Surge protector up to 20 KV
- GFR – Ground fault receptacle
- RGBW – color changing programmable LED
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)