

Date: _____

Type: _____

Project: _____

QUANTUM WALL MOUNT

Contemporary wall mount with sleek, modern look. The corners are sharp and exudes a standard encompassing glow. Up light & down light distributions are options. Contact Solera for custom length.

Construction: Fixture housing constructed from aluminum extrusion. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

Mounting: Fixture is suitable to mount to a standard recessed J-box by others.

Lens: Opal lens

Lamp: High power LEDs with 50,000 hrs. rated lamp life
L70% lumen maintenance
3000K, 3500K, 4000K, 5000K color temperature
CRI 80

Driver: 60Hz, 120-277V / 347-480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

Options: 0-10V Dimming, 1% Dimming, Wet location, emergency driver, remote driver


Finish: Black, White, Silver Gray, Bronze
(Custom color available upon request)

Listing: Complies with CSA & UL Standards, for indoor and outdoor location.

Warranty: 5-year limited warranty



QUANTUM:

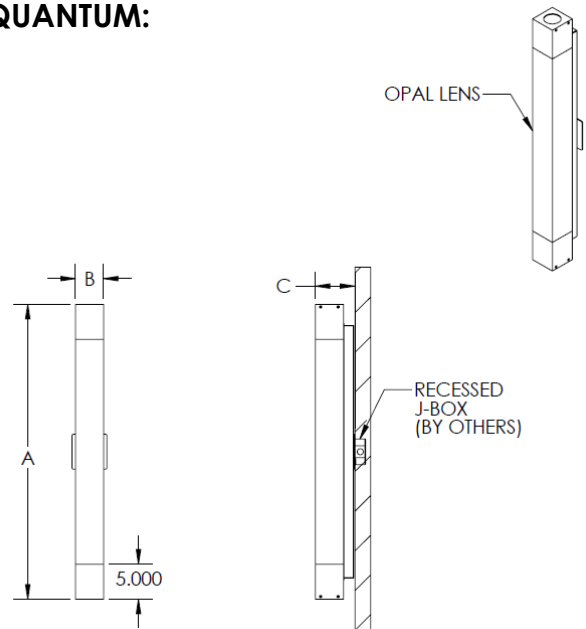

FIXTURE	DIM-A	DIM-B	DIM-C
QUANTUM-24	24.00"	4.00"	5.625"
QUANTUM-42	42.00"	4.00"	5.625"

--	--	--	--	--	--	--	--	--

Name	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options		Finish
QUANTUM-24	12W LED	3000K	UNV	WM-OCT	OAL	EG (std)	DM	DM1	BL
QUANTUM-42	24W LED	3500K	HLV				TP	RB	BZ
		4000K					TS	WL	WH
		5000K					RGBW	EM	SG
							7W U/D		
									CC
Contact Factory for custom lengths									

Notes:

- UNV – Universal voltage (120-277V)
- HLV – High Low voltage (347-480V)
- WM-OCT – Wall mount over octagonal J-box (North America only)
- OAL – Opal lens
- EG – Encompassing glow
- DM – 0-10V dimming
- DM1 – 1% dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- RB – Remote driver
- WL – Wet location
- RGBW – Programmable color changing LEDs
- EM – Emergency driver
- 7W U/D – 7watt-MR16-GU10 for up and/or down light; lamp by others
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)