

Date: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_

## QUANTUM WALL MOUNT

Contemporary wall mount with sleek, modern look. The corners are sharp and exudes a standard encompassing glow. Up light & down light distributions are options. Contact Solera for custom length.

**Construction:** Fixture housing constructed from aluminum extrusion. Weatherproof silicon gasket seal for all weather protection. Stainless steel external hardware for corrosion resistance.

**Mounting:** Fixture is suitable to mount to a standard recessed J-box by others.

**Lens:** Opal lens

**Lamp:** High power LEDs with 50,000 hrs. rated lamp life  
L70% lumen maintenance  
3000K, 3500K, 4000K, 5000K color temperature  
CRI 80


**Driver:** 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with Ambient Operating Temperature -40°C to 55°C.

**Options:** 0-10V Dimming, 1% Dimming, Wet location, emergency driver, remote driver

**Finish:** Black, White, Silver Gray, Bronze  
(Custom color available upon request)

**Listing:** Complies with CSA & UL Standards, for indoor and outdoor location.

**Warranty:** [5-year limited warranty](#)

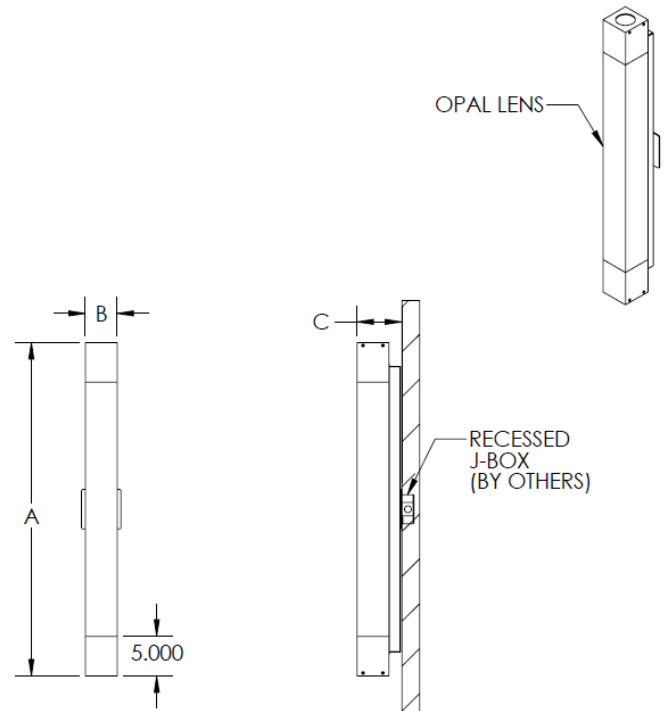

FIXTURE	DIM-A	DIM-B	DIM-C
QUANTUM-24	24.00"	4.00"	5.625"
QUANTUM-42	42.00"	4.00"	5.625"



--	--	--	--	--	--	--	--	--

Name	Light Engine	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options		Finish
QUANTUM-24	12W LED (max)	3000K	UNV	WM-OCT	OAL	EG (std)	DM	DM1	BL
QUANTUM-42	24W LED (max)	3500K	HLV				TP	RB	BZ
		4000K					TS	WL	WH
		5000K					RGBW	EM	SG
							7W U/D		
	Contact Factory for custom lengths								CC

**Notes:**

- UNV – Universal voltage (120V - 277V)
- HLV – 347V line voltage
- WM-OCT – Wall mount over octagonal J-box (North America only)
- OAL – Opal lens
- EG – Encompassing glow
- DM – 0-10V dimming
- DM1 – 1% dimming
- TP – Tamperproof hardware
- TS – Tamperproof bits
- RB – Remote driver
- WL – Wet location
- RGBW – Programmable color changing LEDs
- EM – Emergency driver
- 7W U/D – 7watt-MR16-GU10 for up and/or down light; lamp by others
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (Confirm RAL No. prior to production)