



Date
Quote #
Project Name
Type



QUARD - Ceiling Mount

Description:

Constructed a square opal acrylic lens and an aluminum top piece that secures to the ceiling. Down light (D) is standard, up and down light also available (UD). All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
QUARD-24	24 36W LED (Max)	6336	2700K	UNV 120-277V
QUARD-36	36 49W LED (Max)	8628	3000K	HLV 347-480V
QUARD-48	48 64W LED (Max)	11264	3500K	
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
CM	Ceiling mount	OAL	Opal acrylic lens	D	Down light (Std)	DM	0-10V dimming	Standard	
				UD	Up and down light	DM 1	1% dimming	BL	Black
						RB	Remote ballast/driver	WH	White
						SF	Single fuse	SG	Silver Grey
						EM	Emergency battery	BZ	Bronze
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

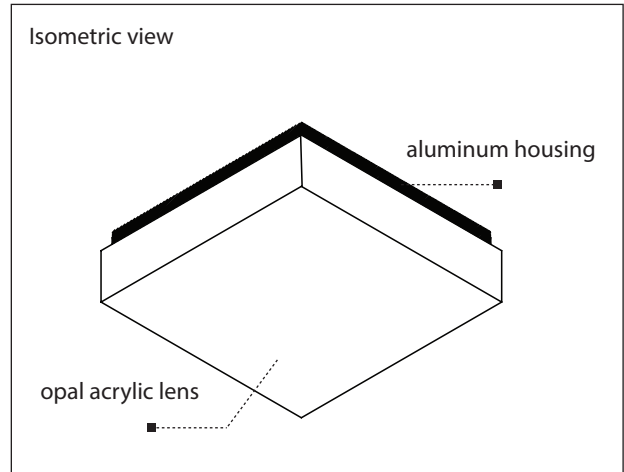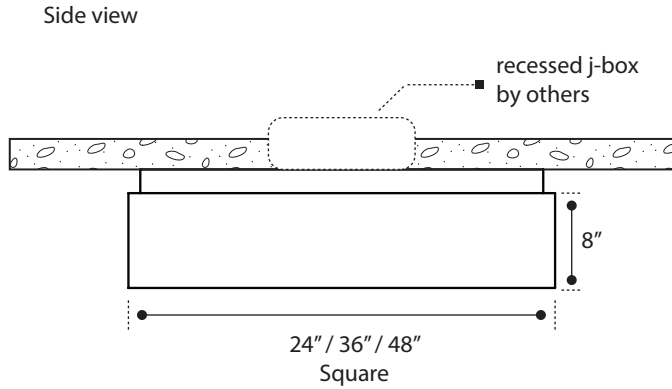

Listing:

Complies to CSA and UL standards.

Polar Graph:

