



Date
Quote #
Project Name
Type



QUARD - Ceiling Mount

Description:

Constructed a square opal acrylic lens and an aluminum top piece that secures to the ceiling. Down light (D) is standard, up and down light also available (UD). All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
QUARD-24	24 36W LED (Max)	6336	2700K	UNV 120-277V
QUARD-36	36 49W LED (Max)	8628	3000K	HLV 347-480V
QUARD-48	48 64W LED (Max)	11264	3500K	
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
CM Ceiling mount	OAL Opal acrylic lens	D Down light (Std)	DM 0-10V dimming	Standard
		UD Up and down light	DM 1 1% dimming	BL Black
			RB Remote ballast/driver	WH White
			SF Single fuse	SG Silver Grey
			EM Emergency battery	BZ Bronze
				Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

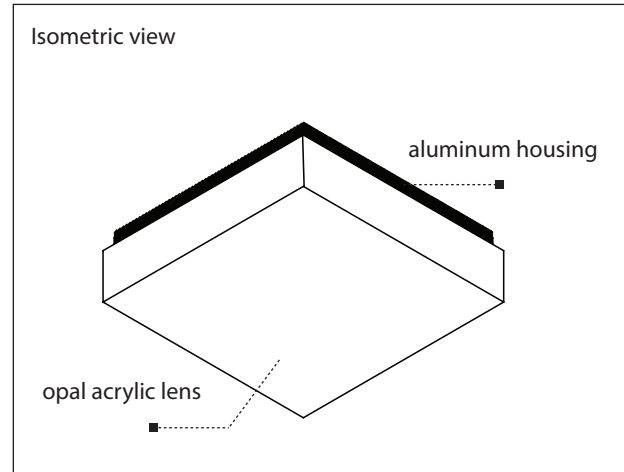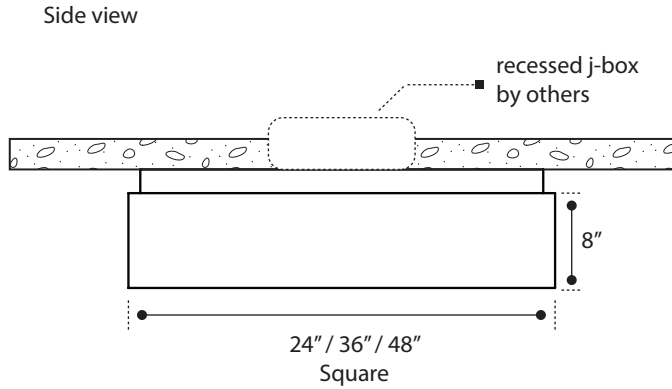

Listing:

Complies to CSA and UL standards.

Polar Graph:

