

Date: _____

Type: _____

Project: _____

ROCK-CO WALL MOUNT

Introducing the take-off from our ROCK Family. The ROCK OFFCUT Wall Mount is a decorative piece with indirect illumination. Made from extruded aluminum with smooth, solid curved front design, there is an option for stainless steel construction. Its slim profile and unique dimensions provide stylish and attractive addition to any area lighting. It features an opal cylindrical lens sitting behind the curved front solid shield. Contact Factory for custom laser etching.

Construction: Carefully crafted using aluminum alloy seamlessly finished showing smooth surface. Its stainless-steel external hardware and all-weather silicon gasket seal ensures corrosion resistance and durability to guarantee long-lasting performance.

Mounting: The fixture housing mounts over octagonal J-box with four wall-mounting screws.

Lens: opal tube lens

Light distribution: back glow

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K

Driver: 60Hz, 120-277V / 347-480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10v dimming, voltage-specific button photocell, programmable color changing LED, stainless-steel construction, tamper-proof hardware, tamperproof bits



Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for outdoor location

Warranty: 5-year limited warranty



ROCK-CO-WM:

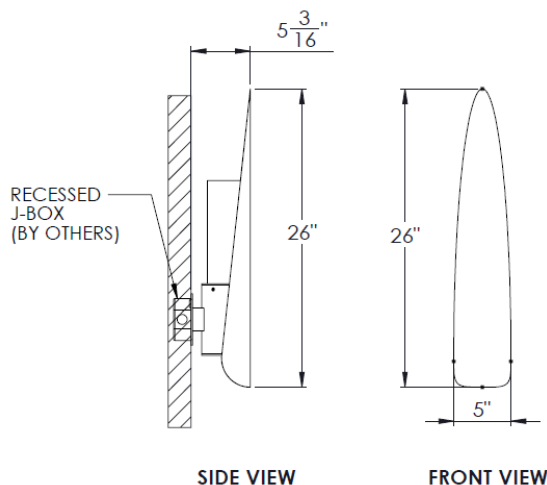

ISOMETRIC VIEW

--	--	--	--	--	--	--	--	--

Name	Light Engine	Color Temperature	Electrical	Mounting	Lens	Light Pattern	Options	Finish
ROCK-CO	30W LED	3000K	UNV	WM	OPL	BG	DM	BL
		3500K	HLV				PC	BZ
		4000K					RGBW	SG
		5000K					SS	WH
		custom wattage available					TP	CC
						TS	H-DIP	

Notes:

- 3000K – 152 lm/w
- 3500K – 157 lm/w
- 4000K – 160 lm/w
- 5000K – 160 lm/w
- UNV – Universal voltage (120-277V)
- HLV – High low voltage (347-480V)
- WM – Wall mounted
- OPL – Opal tube lens
- BG – Back glow
- DM – 0-10V dimming
- PC – Voltage specific button photocell
- RGBW – Programmable color changing LED
- SS – Stainless-steel construction
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WL – Wet location
- BL – Minitex black
- BZ – Minitex bronze
- SG – Minitex silver gray
- WH – Minitex white
- CC – Custom color (Confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)