



Date
Quote #
Project Name
Type



RWH - Ceiling Recessed

Description:

Spun aluminum lamp housing with a flat door frame, trim and tray. Units are also provided with auxiliary junction box for through wiring.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
RWH	60 LED (Max)	6247	2700K	UNV 120-277V
	150MH		3000K	HLV 347-480V
	150HPS		3500K	TT Tri-Tap(HID)
	PLT57		4000K	MT Multi-Tap(HID)
			5000K	
	<i>Contact for custom</i>	<i>Contact for custom</i>	<i>Contact for custom</i>	

Mounting	Lens	Light Pattern	Options	Finishes
RT Recessed in T-Bar ceiling (Non-IC)	CG Clear glass lens (Std)	D Down light	TP Tamperproof hardware	BL Black WH White
RP Recessed in plaster (Non-IC)	PG Prismatic glass lens		TS Tamperproof screws	SG Silver Grey BZ Bronze
			SF Single fuse	
			EM Emergency battery	



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

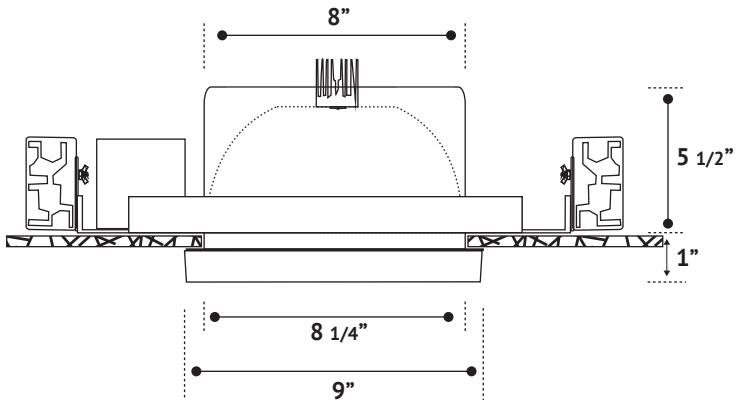

Bottom View

Listing:

Complies to CSA and UL standards.

Polar Graph:

