



Date
Quote #
Project Name
Type



RXC - Ceiling Recessed

Description:

Spun aluminum lamp housing with a flat door frame and trim. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
RXC	60 LED (Max)	6247	2700K	UNV 120-277V
	150MH		3000K	HLV 347-480V
	150HPS		3500K	TT Tri-Tap(HID)
	PLT57		4000K	MT Multi-Tap(HID)
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
RTC Recessed in concrete	CG Clear glass lens (Std)	D Down light	TP Tamperproof hardware	Standard
	PG Prismatic glass lens		TS Tamperproof screws	BL Black
			SF Single fuse	WH White
			EM Emergency battery	SG Silver Grey
				BZ Bronze
				Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

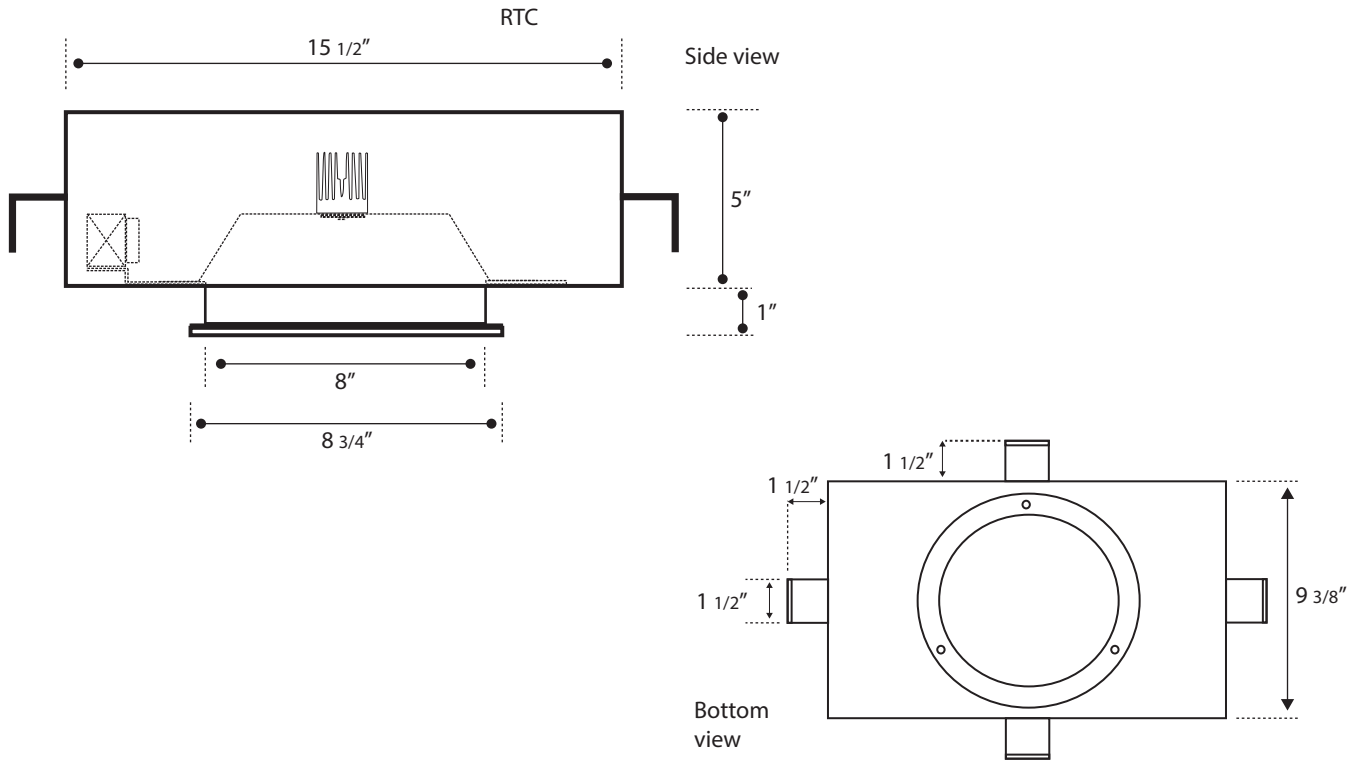

Listing:

Complies to CSA and UL standards.

Polar Graph:

