



Date
Quote #
Project Name
Type



## SABRE - Pendant

### Description:

Constructed of fabricated aluminum and an opal acrylic lens. Optionally available, with bi-pin holders for fluorescent lamps.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
SABRE	60W LED (Max)	10560	2700K	UNV 120-277V
	2X28T5		3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	
	<i>Contact for custom</i>	<i>Contact for custom</i>	<i>Contact for custom</i>	

Mounting	Lens	Light Pattern	Options	Finishes
2AC48 2X48" aircraft cables	OAL Opal acrylic lens (Std)	EG Encompassing glow	DM 0-10V dimming	BL Black
			DM1 1% dimming	WH White
				SG Silver Grey
				BZ Bronze



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

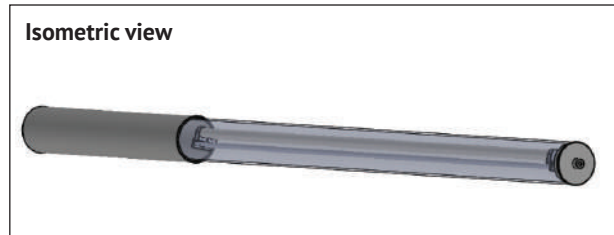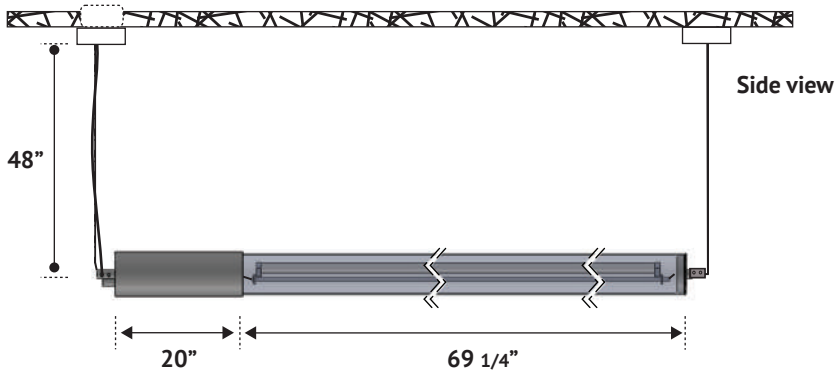

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

