




Date
Quote #
Project Name
Type

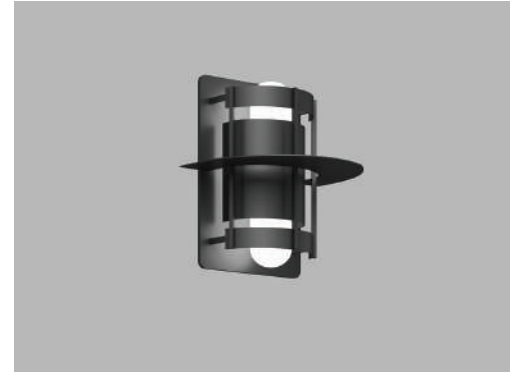

SAT - Wall Mount

Description:

Fabricated aluminum housing with 3 vertical trusses supporting upper and lower glare shields and one center disk. Lamp is enclosed in a prismatic bullet lens (Std). Gasketed connections for full weather-proof protection.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
------	--------------	---------------------------------------	------------	------------

SAT

2X20W LED (Max)

5388

2700K

UNV 120-277V

3000K

HLV 347-480V

3500K

4000K

5000K

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
----------	------	---------------	---------	----------

WM Wall mount

PGB Prismatic glass bullet (Std)

UD Up and down light (Std)

DM 0-10V dimming

Standard

BL Black

CGB Clear glass bullet

D Down light only

OCD Off center disk

WH White

U Up light only

WL Wet location

SG Silver Grey

BZ Bronze

TP Tamperproof hardware

Custom

CC Custom Color


See website for custom colors.
Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering



Dimensions & Mounting:

Please note that drawings are not to scale.

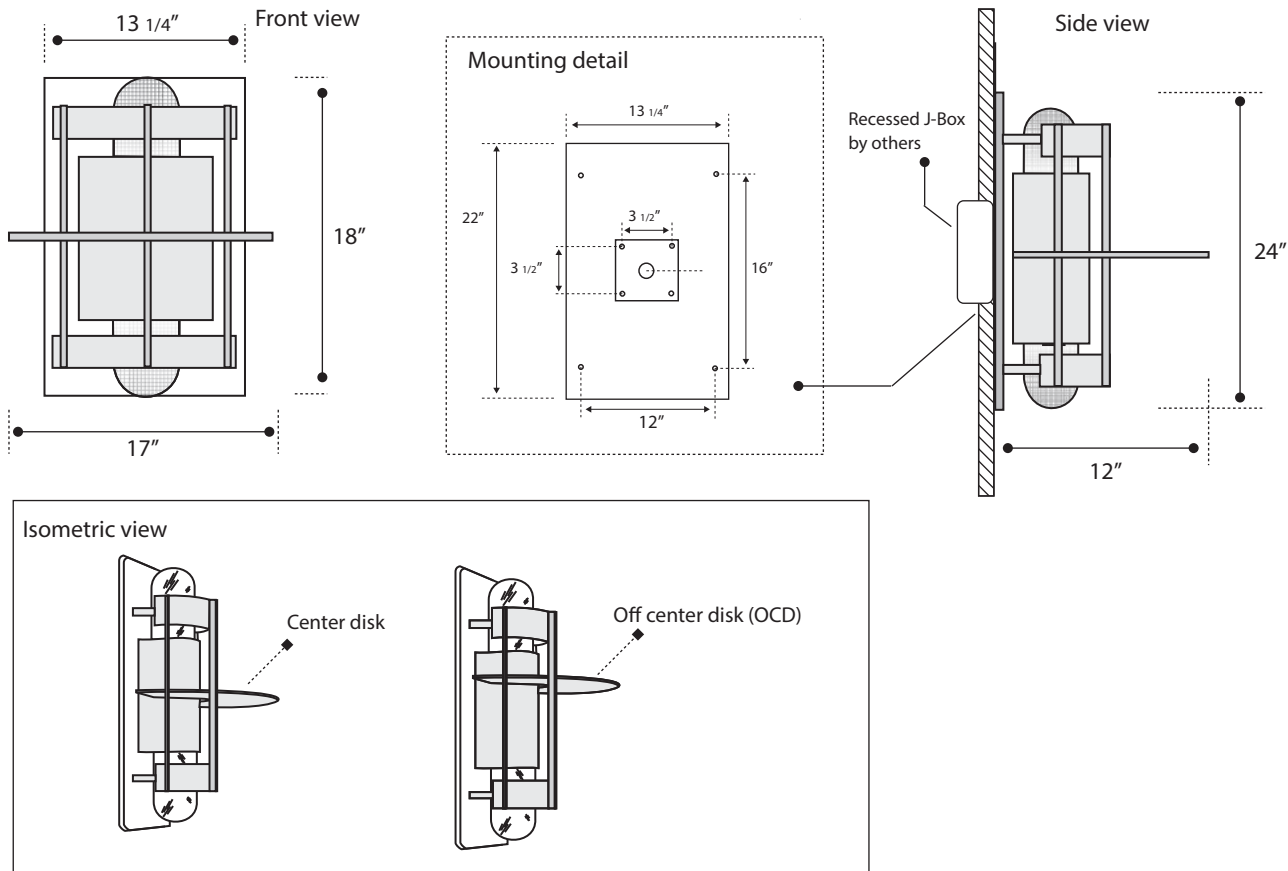

Listing:

Complies to CSA and UL standards.

Polar Graph:

