



Date
Quote #
Project Name
Type



SAT-S - Pendant

Description:

Extruded aluminum housing with 3 vertical decorative bars and lens on the bottom. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SAT-S	3W LED (Max)	428	2700K	UNV 120-277V
			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
AC24 24" aircraft cable	CG Clear glass lens (Std)	D Down light (Std)	DM 0-10V dimming	Standard
CM Ceiling mount			DM1 1% dimming	BL Black
			OCD Off center disk	WH White
				SG Silver Grey
				BZ Bronze
				Custom
				CC Custom Color
				See website for custom colors. Contact factory for physical samples.





- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

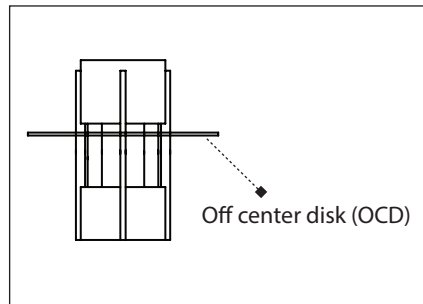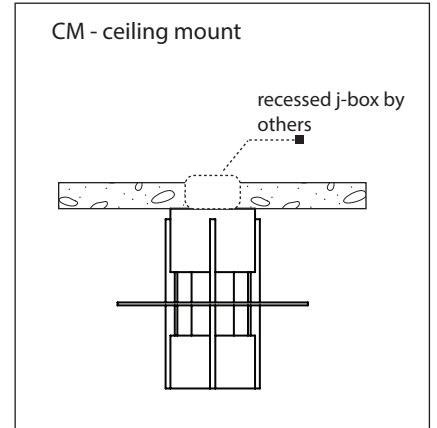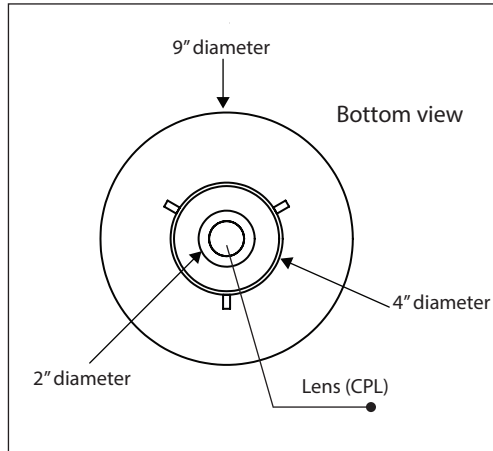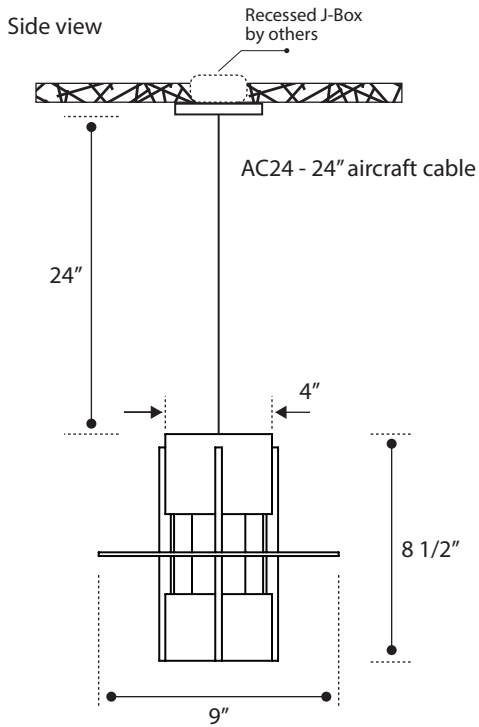

Listing:

Complies to CSA and UL standards.

Polar Graph:

