

Date: _____

Type: _____

Project: _____

SATIN PENDANT

We introduce these durable & sleek light cylinders. SATIN carries that unique housing design providing you with innovative, eye-catching choice for your indoor plan. Have a funky idea? Try doing color-changing RGBW lights. Try creating your very own laser cut design. You have the freedom to choose and be one of a kind.

Construction: These cylinder lights feature a durable fixture housing made from lightweight aluminum extrusion. Plus, all external hardware is crafted from stainless steel, ensuring excellent corrosion resistance. Contact Factory for your preferred housing design pattern.

Mounting: It is suitable to mount over octagonal J-box. Mounted as a single pendant or in clusters. Also available as wall mount.

Lens: Comes with opal lens to highlight the precise, laser cut housing design adapted for the fixture housing. Silicone-sealed for added durability.

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light distribution: Exudes an encompassing glow enhancing the attractive luminaire body. We offer an additional down light for the 6" SATIN fixture with maximum down light of 20 watts.


Driver: 60Hz, 120-277V / 347V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: 0-10V dimming, 1% dimming, remoted driver, RGBW programmable color changing LEDs


Finish: black, white, silver grey, bronze, custom color available upon request

Listing: complies with CSA & UL standards; label for indoor location


Warranty: 5-year limited warranty

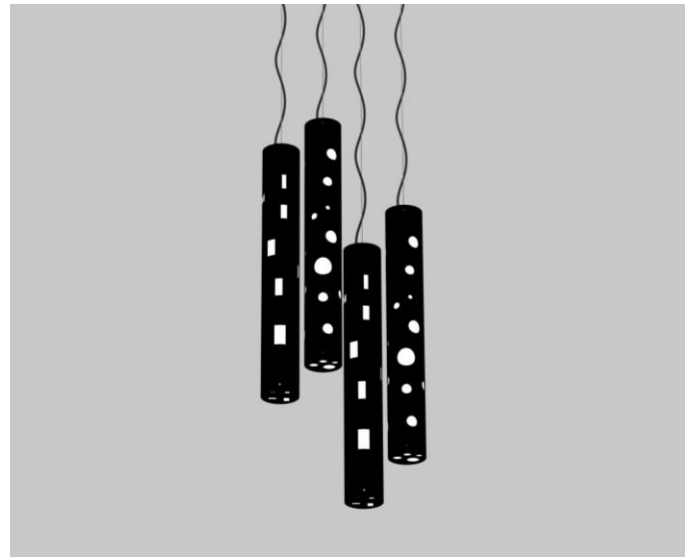

SATIN:

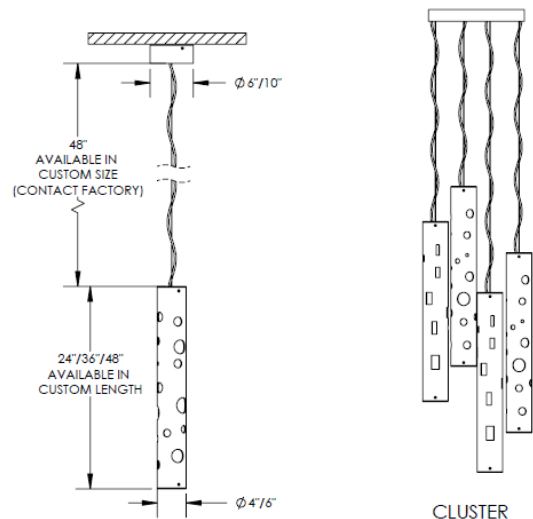

PATTERN OPTIONS:



PATTERN-1

PATTERN-2

PATTERN-3

--	--	--	--	--	--	--	--	--	--	--

Name	Height	Light Engine	Electrical	Housing Pattern	Color Temp	Mounting	Lens	Light Distribution	Options	Finish
SATIN-4	24"	20W	UNV	HP1	3000K	AC	OPL	EG (Std)	DM	BL
SATIN-6	36"	32W	HLV	HP2	3500K	CLU		EG+D (20W max, for SATIN-6 only)	DM1	BZ
	48"	44W		HP3	4000K	WM			RB	SG
					5000K	P			RGBW	WH
										CC
Custom height & housing patterns available										

Notes:

- 3000K – 156 lm/w, general
- 3500K – 159 lm/w, general
- 4000K – 164 lm/w, general
- 5000K – 166 lm/w, general
- UNV – Universal voltage (120-277V)
- HLV – 347V line voltage
- HP1 – Housing pattern 1, contact factory for custom design
- HP2 – Housing pattern 2, contact factory for custom design
- HP3 – Housing pattern 3, contact factory for custom design
- AC – Aircraft cable, 48" standard length, field-adjustable
- CLU – Cluster mounting, standard cluster of three fixtures (CLUX3), specify other cluster quantities
- WM – Wall mounted
- P – Sturdy pendant stem, 36" standard length, field-cutable
- OPL – Opal lens
- EG – Encompassing glow
- EG+D – Encompassing glow with down light, 20W maximum, for SATIN-6 only
- DM – 0-10V dimming
- DM1 – 1% dimming
- RB – Remote driver
- RGBW – Programmable, color changing LEDs
- BL – Minitex black
- BZ – Minitex bronze
- SG – Minitex silver grey
- WH – Minitex white
- CC – Custom color (confirm RAL No. prior to production)