


Date:
Type:
Project:

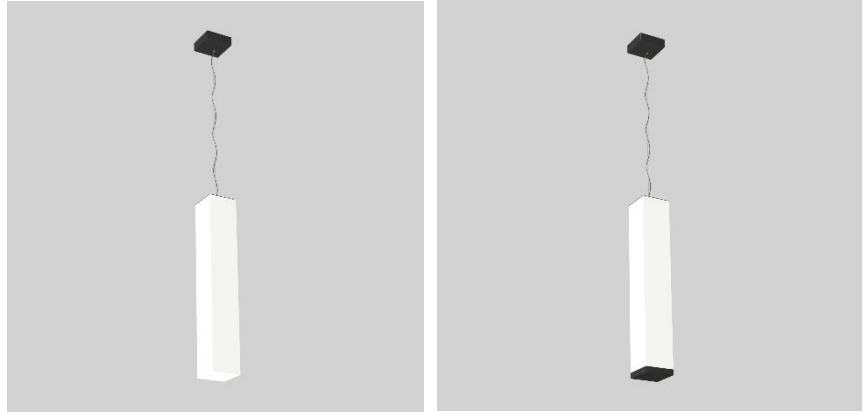

SBP-O PENDANT

A cuboidal pendant that is illuminated on all sides; with an opal rectangular lens hanging from an extruded top cap. Choose from different sizes. Opal lens at the bottom is standard. Down light & solid metal bottom are options.

Name	Size	Lamping	Lumens*	Color Temp	Electrical			Mounting
SBP-O	4 x 24	15W LED	2640	3000K	UNV	120-277V	P36-CMB	36" sturdy stem from a ballast canopy
	6 x 36	24W LED	4224	3500K	HLV	347-480V	AC48-CMB	48" aircraft cable from a ballast canopy
	8 x 48	44W LED	7744	4000K				
	10 x 48	44W LED	7744	5000K				
	12 x 60	56W LED	9856					

Contact for custom lengths, wattages, & lumens

Lens		Light Pattern		Options			Finishes	
OAL	Opal acrylic rectangular lens (Std)	EG	Encompassing glow (Std)	DM	0-10V Dimming	BL	Black	
		EG + D15	Encompassing glow + downlight, 15 degrees	DM1	1% dimming	BZ	Bronze	
		EG + D10	Encompassing glow + downlight, 10 degrees	SV	Swivel Canopy	WH	White	
				RB	Remote driver	SG	Silver Grey	
				SF	Single fuse			
				RGBW	Color changing LEDs	BA4	Brushed Aluminum #4	
		SMB	Solid metal bottom	CC	Custom Color			

[See finishes info on website](#)


*Lumens are based on Wattage and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

SBP-O- _____

Customization Notes:

→ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale; all dimensions in inches)

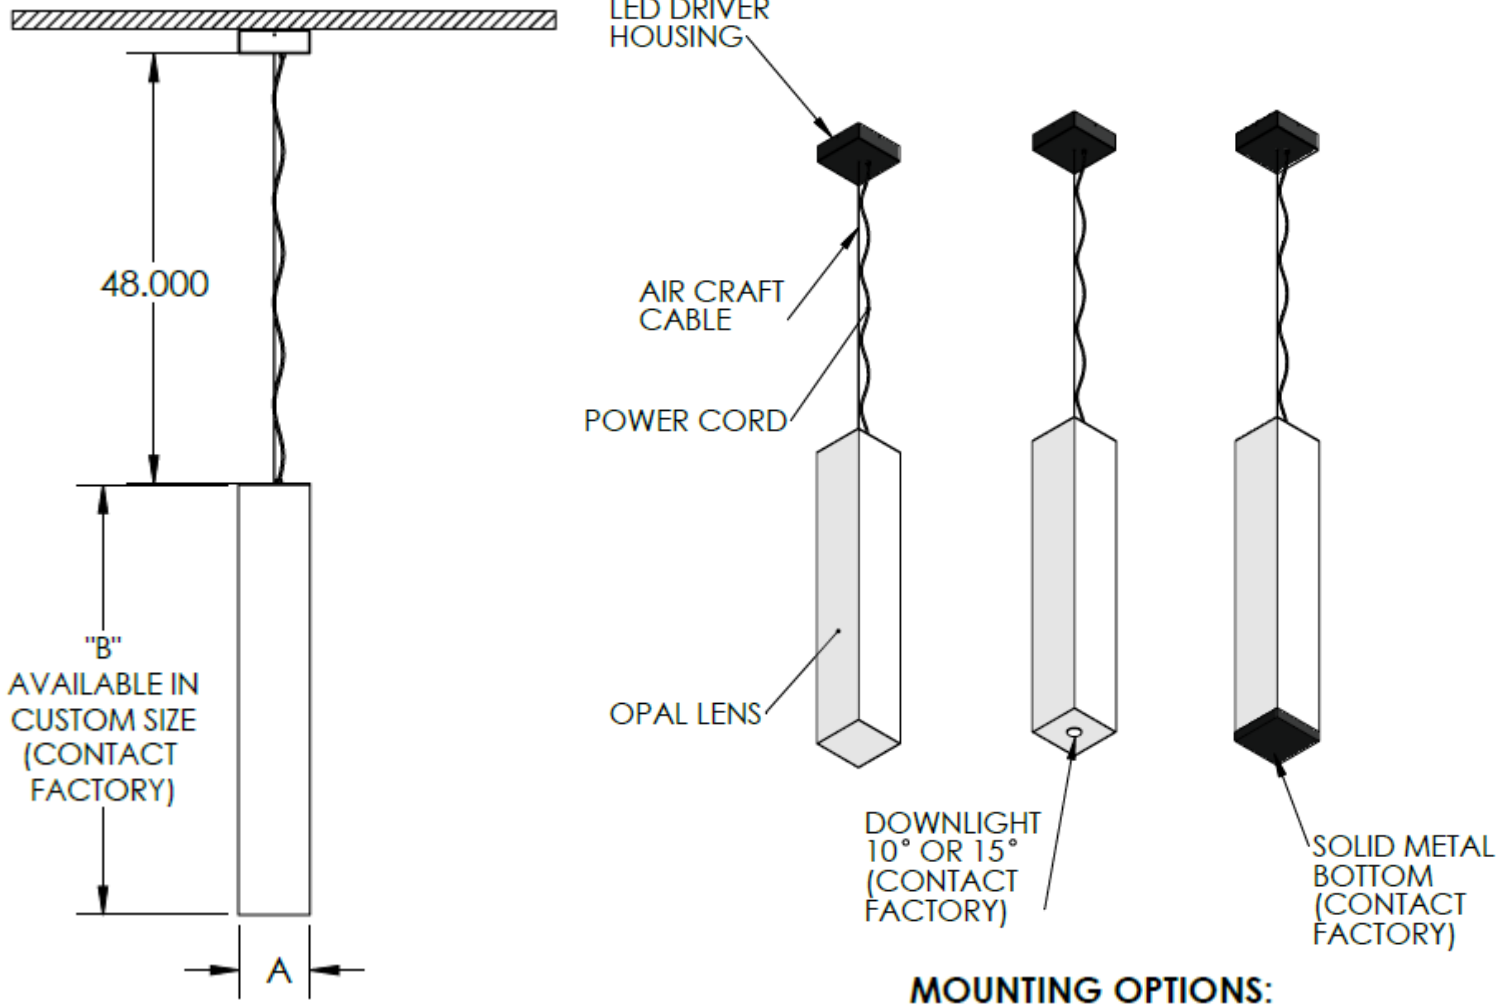

MOUNTING OPTIONS:

AC-48

P-36



PRODUCT	DIM "A"	DIM "B"
SSBP-O-4	4" SQ	24"
SSBP-O-6	6" SQ	36"
SSBP-O-8	8" SQ	48"
SSBP-O-10	10" SQ	48"
SSBP-O-12	12" SQ	60"