




Date
Quote #
Project Name
Type

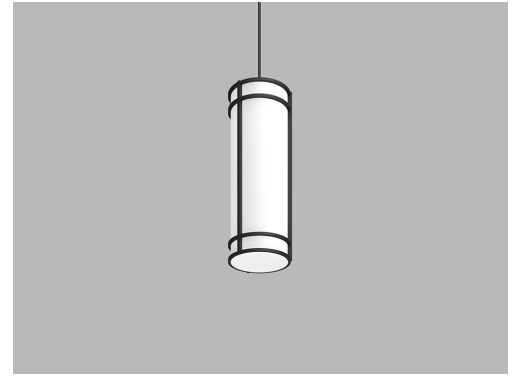

SC - Pendant

Description:

SC is constructed of an opal acrylic lens (cylindrical) and aluminum framework. All external hardware is stainless steel.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SC	60W LED (Max)	10560	2700K	UNV 120-277V
See variations (page 2)			3000K	HLV 347-480V
			3500K	
			4000K	
			5000K	
Contact for custom		Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
P36 36" pendant stem (Std)	OAL Opal acrylic lens	EG Encompassing glow	DM 0-10V dimming	Aluminum framework only Standard
AC36 36" aircraft cable		EG+D Encompassing glow + Down light	DM1 1% dimming	BL Black
WM Wall mount			2CC 2 circuit wiring	WH White
			SF Single fuse	SG Silver Grey
			RB Remote ballast/driver	BZ Bronze
			EM Emergency battery	Custom
			RGBW Programmable color changing LEDs	CC Custom Color
				See website for custom colors. Contact factory for physical samples.

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering









Dimensions & Mounting:

Please note that drawings are not to scale.

P36 - 36" pendant stem

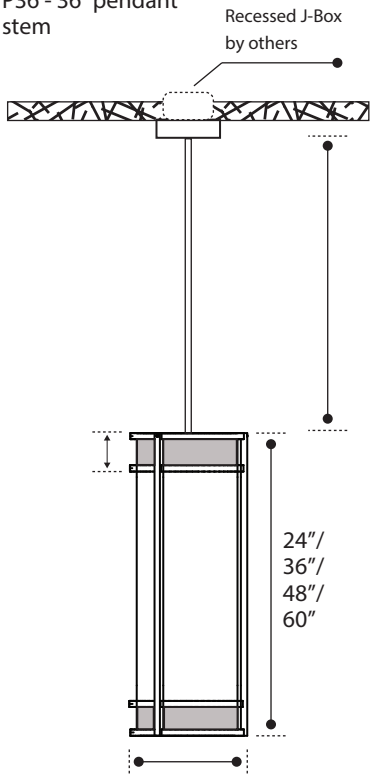

Vertical and horizontal bars customizable (contact factory)

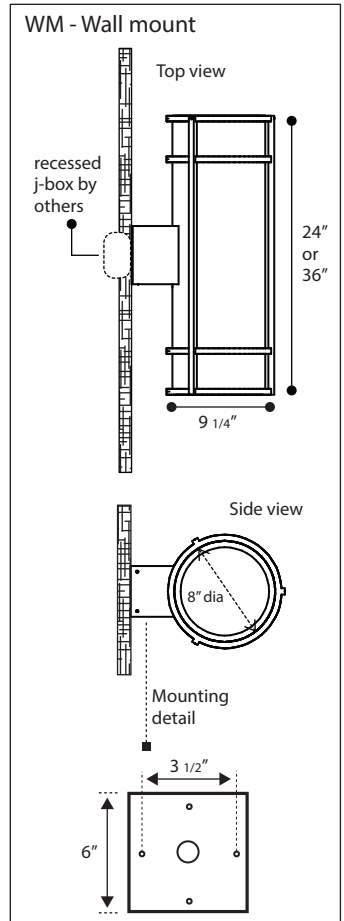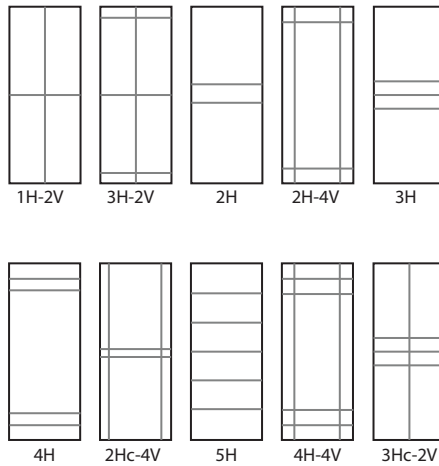

Listing:

Complies to CSA and UL standards.

Polar Graph:

