



Date
Quote #
Project Name
Type



SCSG - Pole mount

Description:

SCSG is of spun aluminum. Door assembly is hinged to fixture housing for easy access and maintenance.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SCSG	288W LED (Max)	31436	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
ER3 Arm for round or square pole	CPL Clear polycarbonate lens (Std)	TY5 Type V (Std)	SD Step dimming	Standard
			MS Motion sensor	BL Black
SPD Spider pole mount	CG Clear glass lens	TY4 Type IV	TCO Trespass cut off	WH White
			PR Prismatic lens (K12)	TY3 Type III
	TYII Type II	EM Emergency battery		BZ Bronze
		DF Double fuse	Custom	
PC Button photocell	CC Custom Color	See website for custom colors. Contact factory for physical samples.		
PCR Photocell receptacle				



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

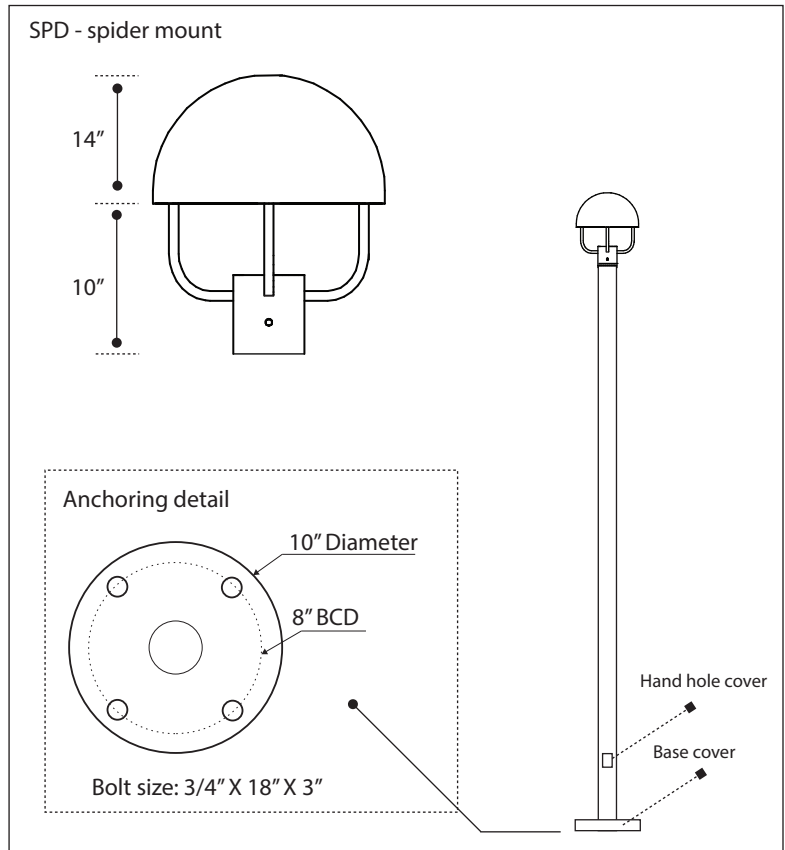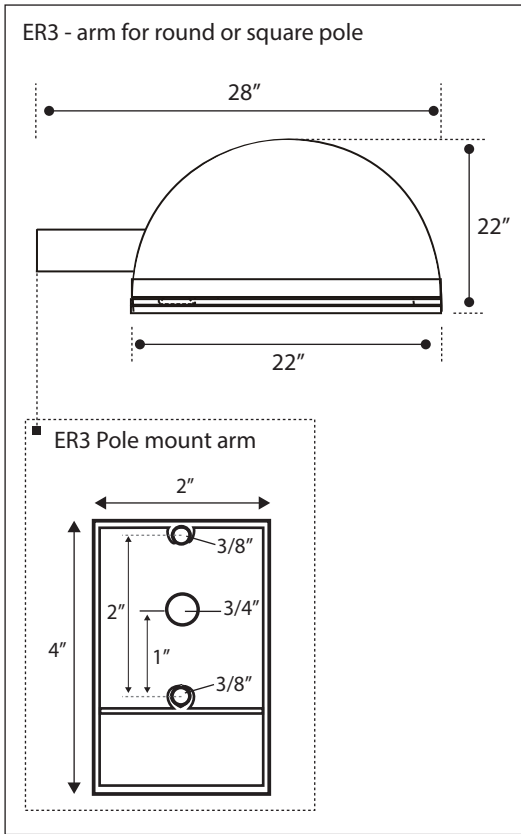


Listing:


Complies to CSA and UL standards.

Polar Graph:


TY5



TY4



TY3



TY2

