



Date
Quote #
Project Name
Type



SCSS - Wall Recessed

Description:

SCSS is made of a cast aluminum and consists of a face plate and back box. Silicone sealed lens and fully gasketed connections for weather protection.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SCSS	24W LED (Max)	3120	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
R	Recessed in dry wall	CG	Clear glass lens (Std)	FT	Forward throw	SD	Step dimming	Standard	
RTC	Recessed in concrete	CPL	Clear polycarbonate lens			MS	Motion sensor	BL	Black
						TP	Tamperproof hardware	WH	White
						TS	Tamperproof screws	SG	Silver Grey
						EM	Emergency battery	BZ	Bronze
		OPL	Opal polycarbonate lens			SF	Single fuse	Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

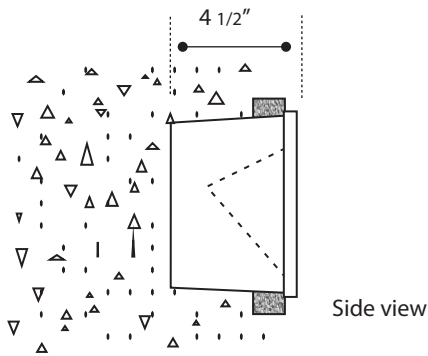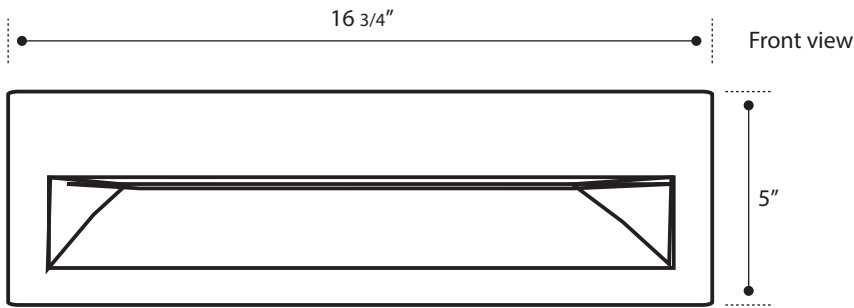

Listing:

Complies to CSA and UL standards.

Polar Graph:

