



Date
Quote #
Project Name
Type



SCSS - Wall Recessed

Description:

SCSS is made of a cast aluminum and consists of a face plate and back box. Silicone sealed lens and fully gasketed connections for weather protection.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SCSS	24W LED (Max)	3120	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Mounting		Lens		Light Pattern		Options		Finishes	
Contact for custom		Contact for custom		Contact for custom					
R	Recessed in dry wall	CPL	Clear polycarbonate lens (STD)	FT	Forward throw	TP	Tamperproof hardware	Standard	
								BL	Black
RTC	Recessed in concrete	OPL	Opal polycarbonate lens			TS	Tamperproof screws	WH	White
						EM	Emergency battery	SG	Silver Grey
						SF	Single fuse	BZ	Bronze
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

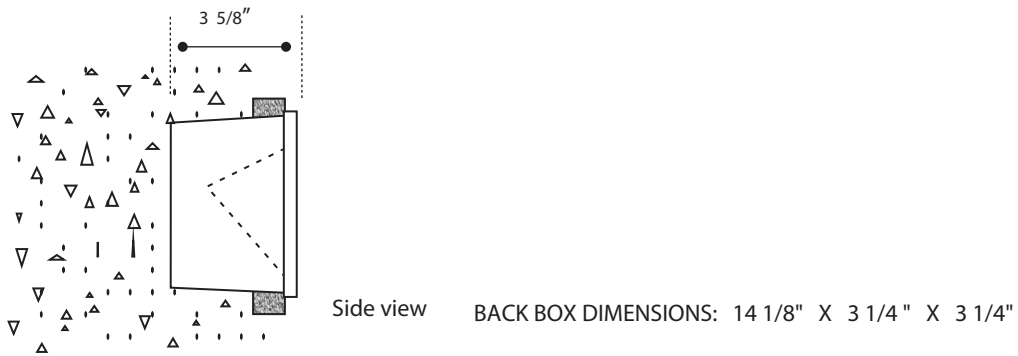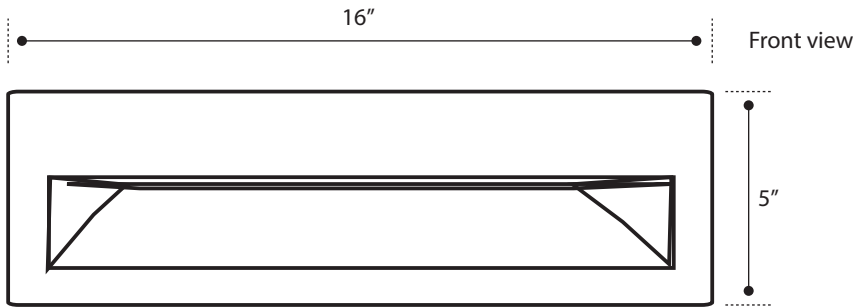

Listing:

Complies to CSA and UL standards.

Polar Graph:

