



| |
|--------------|
| Date |
| Quote # |
| Project Name |
| Type |



SDS - Pendant

Description:

Chandelier style pendant with stems and perforated dish at the bottom. The acrylic lens overlay provides a subtle glow. Available in a copper finish.

SDS - Size - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

| Name | Light Engine | Source Lumens(LED) | Color Temp | Electrical |
|--------|--------------------------------------|--------------------|---------------------------|---------------------------|
| SDS-30 | 30 45W LED (Max) 175 MH PAR38 | 7034 | 2700K | UNV 120-277V |
| | | | 3000K | HLV 347-480V |
| | | | <i>Contact for custom</i> | |
| SDS-60 | 60 45W LED (Max) 400 MH 4CFL42 | 7034 | 3500K | TT Tri-Tap(HID) |
| | | | 4000K | MT Multi-Tap(HID) |
| | | | 5000K | <i>Contact for custom</i> |

| Mounting | Lens | Light Pattern | Options | Finishes |
|---------------------------------|-----------------------|----------------------------|------------------------------|----------------------------------------------------------------------|
| R1 48" stem (Std for SDS-30) | OAL Opal acrylic lens | UD Up and down light (Std) | DM 0-10V dimming | BL Black |
| R2 2X48" stems (Std for SDS-60) | CGL Color glow lens | | DM1 1% dimming | WH White |
| R3 3X48" stems | | | RB Remote ballast/driver | SG Silver Grey |
| R4 4X48" stems | | | SV Swivel canopy | BZ Bronze |
| | | | BG Bug shield | CP Copper |
| | | | ELB Electronic ballast (HID) | BR Brass |
| | | | | CC Custom Color |
| | | | | See website for custom colors. Contact factory for physical samples. |

- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering







Dimensions & Mounting:

Please note that drawings are not to scale.

Side view

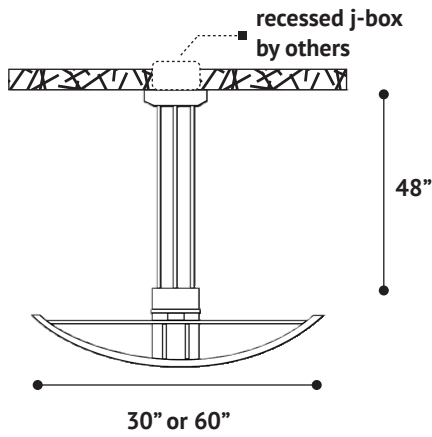

Bottom view

Listing:

Complies to CSA and UL standards.

Polar Graph:

