



|              |
|--------------|
| Date         |
| Quote #      |
| Project Name |
| Type         |



## SIND - Wall Mount

### Description:

SIND is a curved scoop luminaire made from die-formed aluminum. Lens is silicone sealed and connects are gasketed.

|                      |                      |                      |                      |                      |                      |                      |                      |                      |                      |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Name                 | Engine               | Lumens               | CCT                  | Electrical           | Mounting             | Lens                 | Pattern              | Options              | Finish               |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

| Name   | Light Engine  | Source Lumens <sub>(LED)(5000K)</sub> | Color Temp | Electrical        |
|--------|---------------|---------------------------------------|------------|-------------------|
| SIND-S | 42 LED (Max)  | 5460                                  | 2700K      | UNV 120-277V      |
| SIND-M | 72 LED (Max)  | 9360                                  | 3000K      | HLV 347-480V      |
| SIND-L | 144 LED (Max) | 18720                                 | 3500K      | TT Tri-Tap(HID)   |
|        |               |                                       | 4000K      | MT Multi-Tap(HID) |
|        |               |                                       | 5000K      |                   |

Contact for custom

Contact for custom

Contact for custom

| Mounting |                                   | Lens |                               | Light Pattern |            | Options |                       | Finishes |                   |
|----------|-----------------------------------|------|-------------------------------|---------------|------------|---------|-----------------------|----------|-------------------|
| WM       | Wall mount                        | CPL  | Clear polycarbonate lens(Std) | U             | Up light   | DM      | 0-10V dimming         | Standard |                   |
|          |                                   |      |                               |               |            |         |                       | BL       | Black             |
| 2P48     | 2X48" pendant stems for (2 SINDs) | CG   | Clear glass lens              | D             | Down light | WL      | Wet location          | WH       | White             |
|          |                                   | FG   | Frosted glass lens            |               |            | ADJ     | Adjustable wall mount | SG       | Silver Grey       |
|          |                                   | PR   | Prismatic lens (K12)          |               |            | EM      | Emergency battery     | BZ       | Bronze            |
|          |                                   |      |                               |               |            | RB      | Remote ballast/driver | NAT      | Natatorium finish |
|          |                                   |      |                               |               |            |         |                       | Custom   |                   |
|          |                                   |      |                               |               |            |         |                       | CC       | Custom Color      |

See website for custom colors. Contact factory for physical samples.

• Lumens are based on max wattage & 5000K CCT

• IES files available upon request


• Std - Standard Offering






**Dimensions & Mounting:**

Please note that drawings are not to scale.

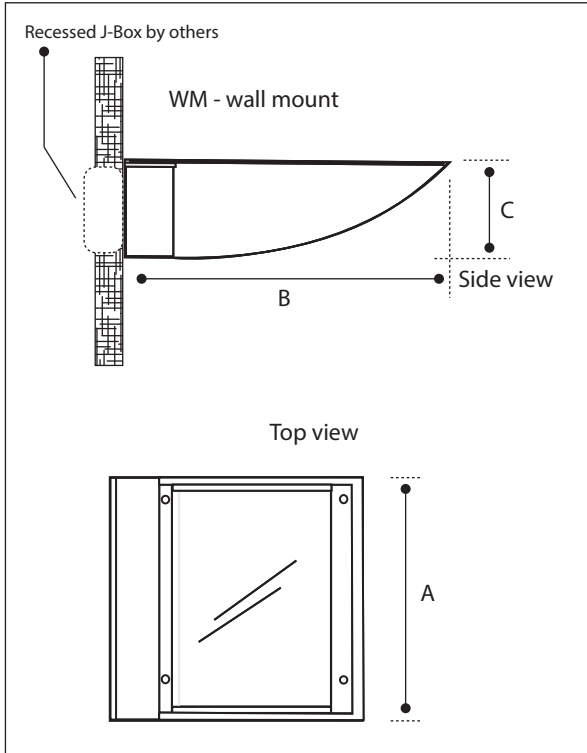

|        | A   | B   | C      |
|--------|-----|-----|--------|
| SIND-S | 9"  | 12" | 5 1/2" |
| SIND-M | 18" | 18" | 5 1/2" |
| SIND-L | 28" | 23" | 5 1/2" |

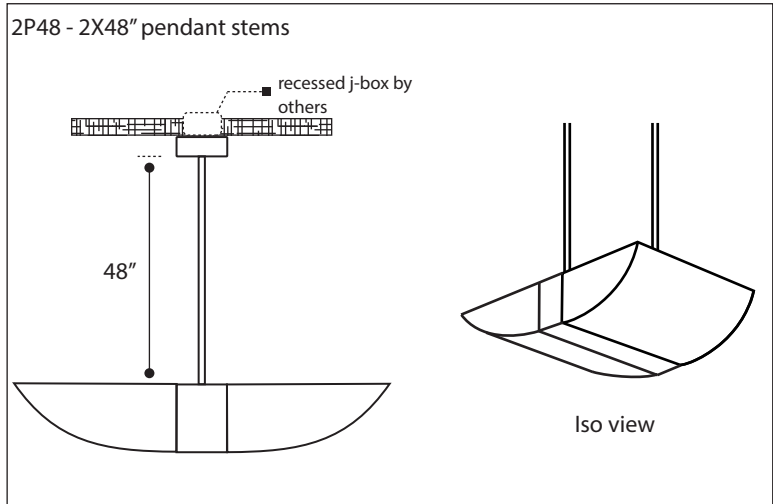

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

