



Date
Quote #
Project Name
Type



SIND - Wall Mount

Description:

SIND is a curved scoop luminaire made from die-formed aluminum. Lens is silicone sealed and connects are gasketed.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SIND-S	S 42 LED (Max) 100 MH	5460	2700K	UNV 120-277V
SIND-M	2PLT42		3000K	HLV 347-480V
SIND-L	M 72 LED (Max) 250 MH	9360	3500K	TT Tri-Tap(HID)
	2PLT42		4000K	MT Multi-Tap(HID)
	L 144 LED (Max) 400 MH	18720	5000K	
	2PLT42			
	Contact for custom	Contact for custom	Contact for custom	

Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall mount	CPL	Clear polycarbonate lens(Std)	U	Up light	DM	0-10V dimming	Standard	
								BL	Black
2P48	2X48" pendant stems for (2 SINDs)	CG	Clear glass lens	D	Down light	WL	Wet location	WH	White
		FG	Frosted glass lens			ADJ	Adjustable wall mount	SG	Silver Grey
		PR	Prismatic lens (K12)			EM	Emergency battery	NAT	Natatorium finish
						RB	Remote ballast/driver	Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

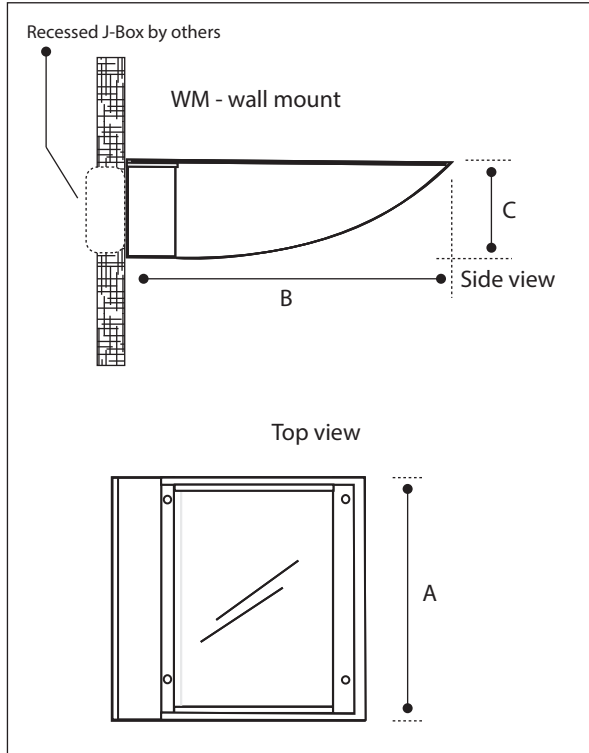

	A	B	C
SIND-S	9"	12"	5 1/2"
SIND-M	18"	18"	5 1/2"
SIND-L	28"	23"	5 1/2"

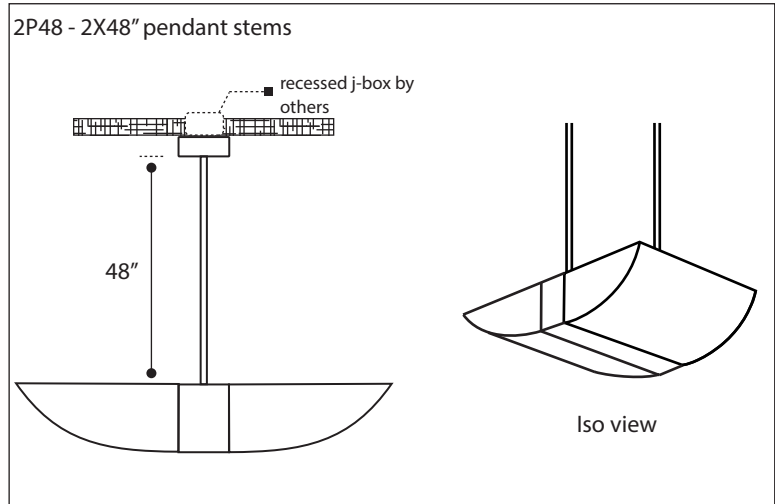

Listing:

Complies to CSA and UL standards.

Polar Graph:

