



Date
Quote #
Project Name
Type



SIND - Wall Mount

Description:

SIND is a curved scoop luminaire made from die-formed aluminum. Lens is silicone sealed and connects are gasketed.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SIND-S	42 LED (Max) 100 MH	5460	2700K	UNV 120-277V
SIND-M	2PLT42		3000K	HLV 347-480V
SIND-L	72 LED (Max) 250 MH 2PLT42	9360	3500K	TT Tri-Tap(HID)
	144 LED (Max) 400 MH 2PLT42	18720	4000K	MT Multi-Tap(HID)
			5000K	
	Contact for custom	Contact for custom	Contact for custom	

Mounting		Lens		Light Pattern		Options		Finishes	
WM	Wall mount	CPL	Clear polycarbonate lens(Std)	U	Up light	DM	0-10V dimming	Standard	
2P48	2X48" pendant stems for (2 SINDs)	CG	Clear glass lens	D	Down light	WL	Wet location	BL	Black
		FG	Frosted glass lens			ADJ	Adjustable wall mount	WH	White
		PR	Prismatic lens (K12)			EM	Emergency battery	SG	Silver Grey
						RB	Remote ballast/driver	BZ	Bronze
								NAT	Natatorium finish
								Custom	
								CC	Custom Color
									See website for custom colors. Contact factory for physical samples.


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:

Please note that drawings are not to scale.

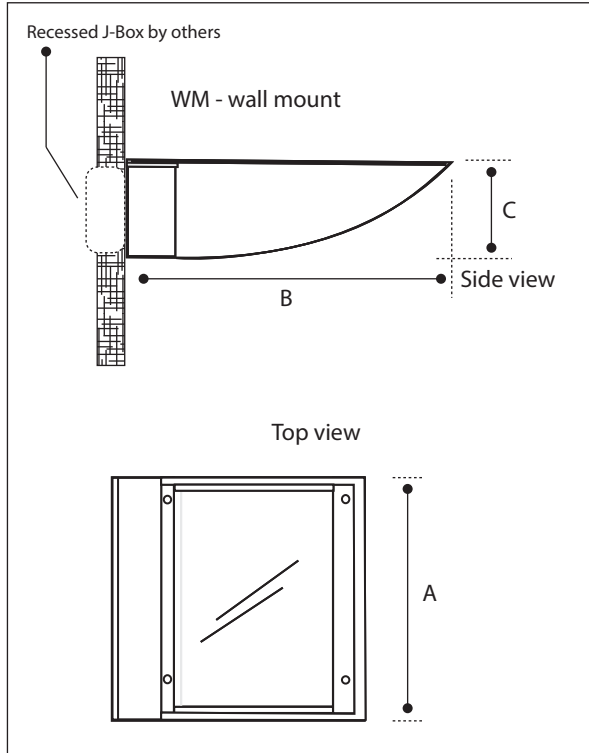

	A	B	C
SIND-S	9"	12"	5 1/2"
SIND-M	18"	18"	5 1/2"
SIND-L	28"	23"	5 1/2"

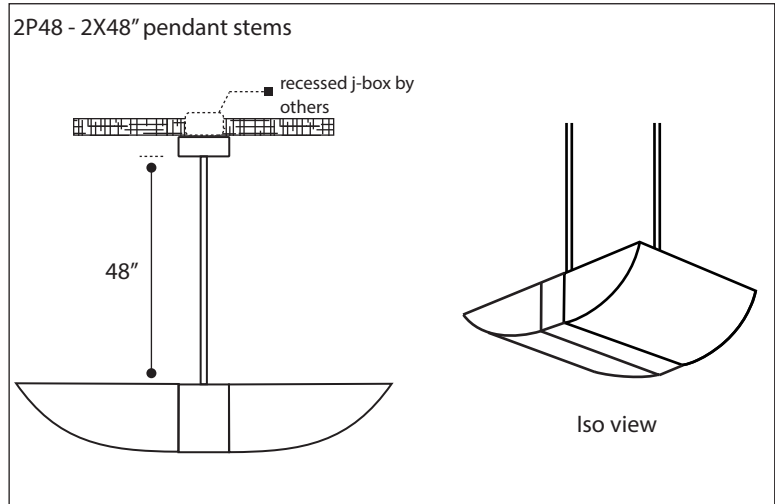

Listing:

Complies to CSA and UL standards.

Polar Graph:

