



Date
Quote #
Project Name
Type



SMPT - Post Top

Description:

Standard post top consists of a aluminum top cap, cast aluminum driver casing and prismatic lens. SMPT-DTC consists of a spun aluminum hood.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SMPT	60W LED (Max)	7800	3000K	UNV 120-277V
SMPT-DTC	100 HPS		3500K	HLV 347-480V
	150 MH		4000K	TT Tri-Tap(HID)
	CFL57		5000K	MT Multi-Tap(HID)

For better illustration on variations see {page}

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
PT3 Post top slips over 3" pole	PR Prismatic lens (K12)	TY5 Type V (Std)	SD Step dimming	Standard
PT4 Post top slips over 4" pole		TY3 Type III	MS Motion sensor	BL Black
			TP Tamperproof hardware	WH White
			TS Tamperproof screws	SG Silver Grey
			PC Bottom photocell	BZ Bronze
			GFI Ground fault interrupter	CC Custom Color
	PCR Photocell receptacle		See website for custom colors. Contact factory for physical samples.	
	TCO Trespass cut off			


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering






Dimensions & Mounting:



Please note that drawings are not to scale.



SMPT

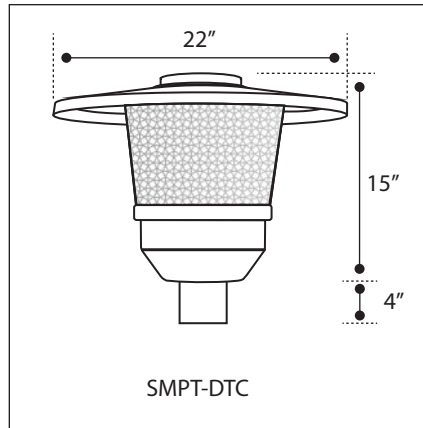

SMPT-DTC

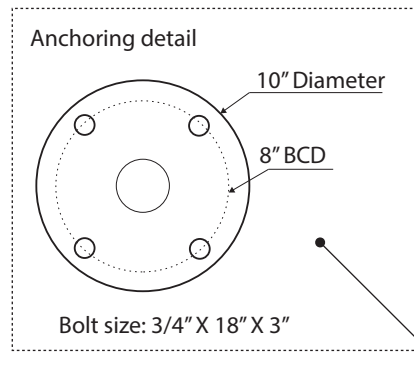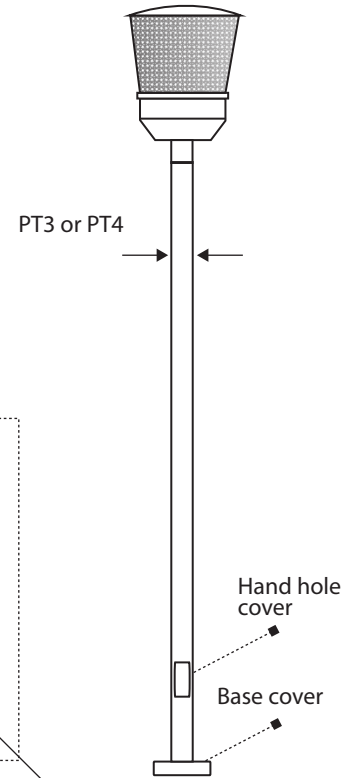

Listing:

Complies to CSA and UL standards.

Polar Graph:

