



Date
Quote #
Project Name
Type



SRB8-T - Light Column

Description:

Constructed of heavy duty aluminum. One piece aluminum shaft with welded edge for a flush finish. Lens frame is secured with 4 screws, where lens is silicone sealed for weather protection. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
SRB8-T	36W LED (Max)	4061	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting		Lens		Light Pattern		Options		Finishes	
ABT	Anchor, bolts and template	OAL	Opal acrylic lens	TY5	Type V (Std)	SD	Step dimming	Standard	
						MS	Motion sensor	BL	Black
						SF	Single fuse	WH	White
						TP	Tamperproof hardware	SG	Silver Grey
						TS	Tamperproof screws	BZ	Bronze
						TS	Tamperproof screws	Custom	
						PC	Button photocell	CC	Custom Color
						GFR	Ground fault receptacle	See website for custom colors. Contact factory for physical samples.	


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

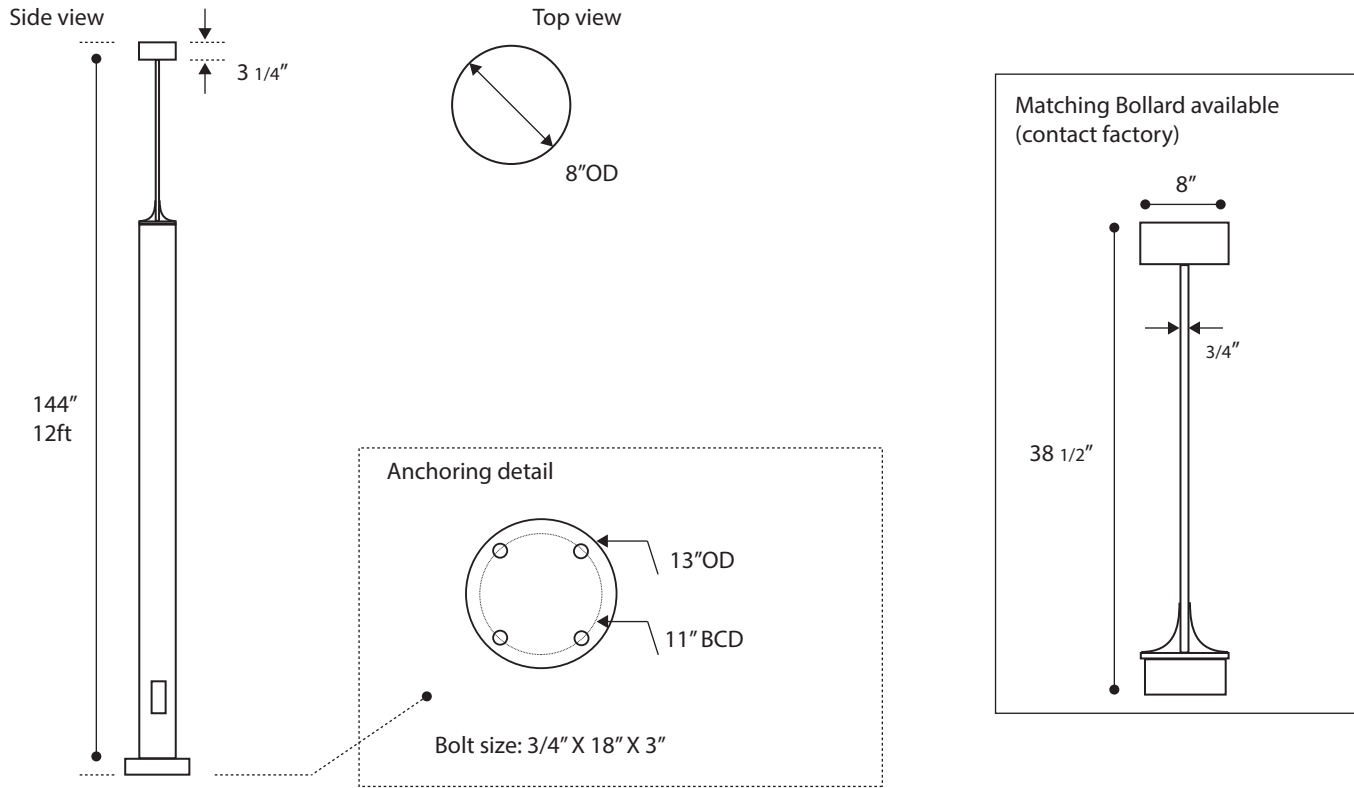

Listing:

Complies to CSA and UL standards.

Polar Graph:

