

Date: _____

Type: _____

Project: _____

2SRBK / SRBK WALL MOUNT

Our durable surface cylinders feature an extruded aluminum housing with silicone sealed lens plus external hardware made of stainless steel for long-lasting quality.

Construction: These round luminaires have durable heavy-duty housing made from lightweight aluminum extrusion. All external hardware is crafted from stainless steel ensuring excellent corrosion resistance.

Mounting: Fixture is suitable to mount over octagonal J-box.

Lens: clear, prismatic

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Light Pattern: Up and down light(2SRBK), Down (SRBK)

Beam Angle: narrow, medium, and wide

Driver: 60Hz, 120-277V / 347V/ 480V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C

Options: 0-10V 10% dimming, button photocell, tamperproof hardware, tamperproof bits


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location


Warranty: 5-year limited warranty




2SRBK:

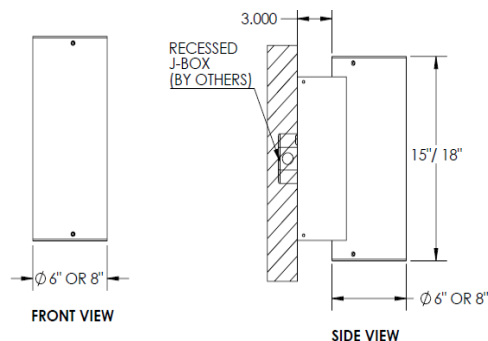

SRBK:

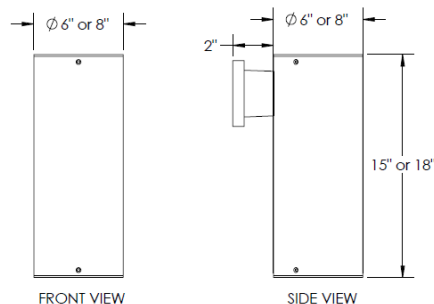

MOUNTING DETAILS:



--	--	--	--	--	--	--	--	--	--	--

Name	Size	Height	Light Engine (maximum per side)	Color Temp	Electrical	Mounting	Lens	Beam Angle	Options	Finish
2SRBK (UP/D)	6"	15"	18W	3000K	UNV	WM	CL	WB	DM	BL
SRBK (D)	8"	18"	29W	3500K	347V		FL	MB	PC	BZ
			40W	4000K	480V		K12	NB	TP	WH
				5000K					TS	SG
			custom size and wattage available						WL	CC
										H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- 347V – 347 volts
- 480V – 480 volts
- WM – Wall mount
- CL – Clear lens
- FL – Frosted lens
- K12 – Prismatic lens
- WB – Wide beam light distribution
- MB – Medium beam light distribution
- NB – Narrow beam light distribution
- DM – 0-10V 10% dimming
- PC – Voltage specific button photocell
- WL – Wet location
- TP – Tamperproof hardware
- TS – Tamperproof bits
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver grey
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)