



Date
Quote #
Project Name
Type



## SRBK - Wall Mount

### Description:

Door frame design made of heavy duty aluminum. SRBK comes with a standard down light. Various beam spreads available such as narrow beam, medium beam, and wide beam.

Name	Engine	Lumens	CCT	Electrical	Mounting	Lens	Pattern	Options	Finish
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Name	Light Engine	Source Lumens <sub>(LED)(5000K)</sub>	Color Temp	Electrical
SRBK-6X15	6X15 18W LED (Max) 70 MH	2378	3000K	UNV 120-277V
SRBK-8X15	8X15 29W LED (Max) 100 MH	3235	3500K	HLV 347-480V
SRBK-8X18	8X18 40W LED (Max) 175 MH	5750	4000K	TT Tri-Tap(HID)
			5000K	MT Multi-Tap(HID)
	Contact for custom	Contact for custom	Contact for custom	

Mounting	Lens	Light Pattern	Options	Finishes
WM Wall mount	CG Clear glass lens	WB Wide beam	DM 0-10V dimming	Standard
PM Pole mount	FG Frosted glass lens	MB Medium beam	IP65 Rated enclosure	BL Black
	PG Prismatic glass lens	NB Narrow beam	PC Button photocell	WH White
			TP Tamperproof hardware	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			RGBW Programmable color changing LEDs	Custom
			AEL Quartz restrike (relay)	CC Custom Color
			MEL Quartz restrike (no relay)	See website for custom colors. Contact factory for physical samples.
				CH Chrome
				ANO Anodized Aluminum




- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





**Dimensions & Mounting:**

Please note that drawings are not to scale.

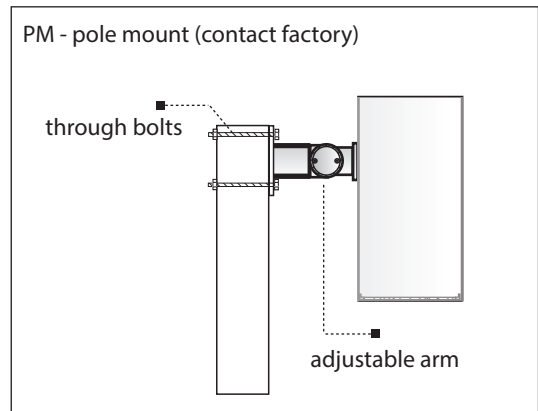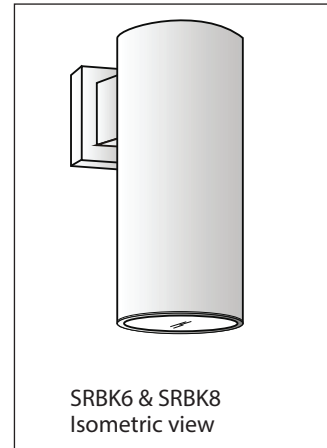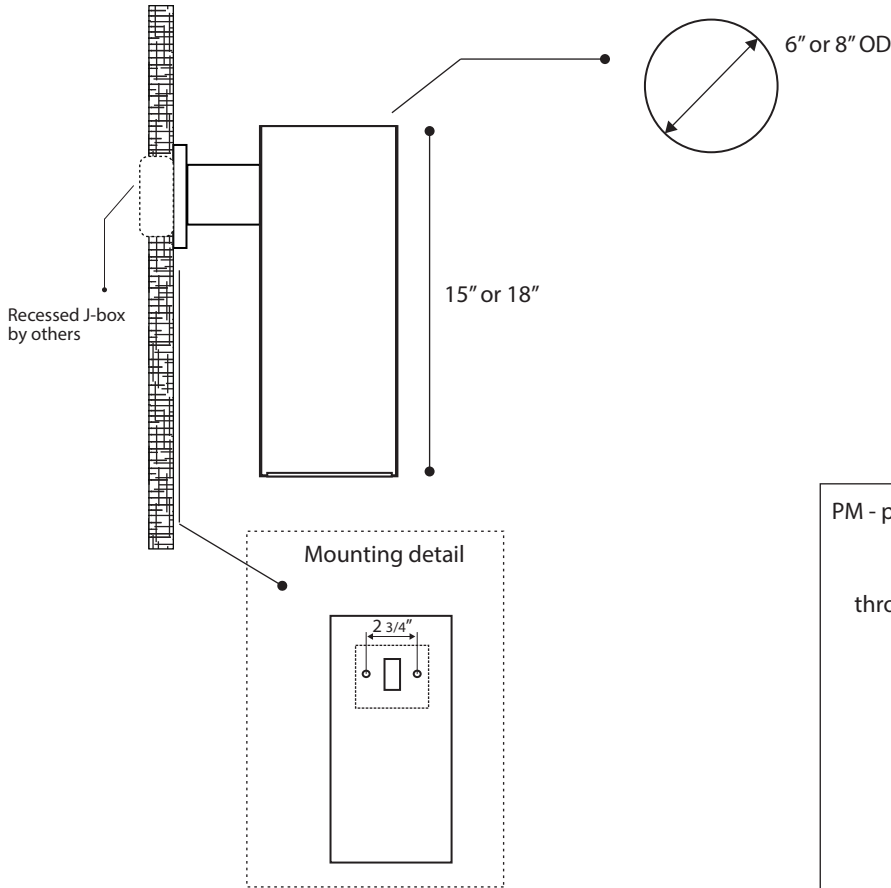

**Listing:**

Complies to CSA and UL standards.

**Polar Graph:**

