

Date: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_

**SRBK5 or 2SRBK5**  
**EXTERIOR CYLINDER**

Exterior wall mounted cylinder with 5" diameter aluminum extrusion housing. Door frames are silicone gasketed for all-weather protection. Standard offering has wide beam light distribution that could be up or down light only (SRBK5) or both up & down light (2SRBK5).



Name	Light Patten & Lamping		Lumens*	Color Temp	Electrical		Mounting	
SRBK5	U	Uplight only	20W LED per side (max)	5000K	UNV	120-277V	WM	Wall mounted (Std)
	D	Downlight only		4000K	HLV	347-480V		
2SRBK5	Up & down light			3500K				
				3000K				

Lens		Optics		Options		Finishes	
CG	Clear Glass Lens (Std)	WB	Wide beam distribution (Std)	DM	0-10V Dimming	BL	Black
FG	Frosted Glass Lens	MB	Medium beam distribution	IP65	IP65 Rated Enclosure	WH	White
PG	Prismatic Glass Lens	NB	Narrow beam distribution	PC	Button Photocell, voltage specific	SG	Silver Gray
						BZ	Bronze
						CC	Custom color

[See finishes brochure for custom](#)

\*General lumens are based on Wattage and 5000K CCT  
 \*Specific IES Files available upon request  
 Std – Standard Offering

SRBK5 or 2SRBK5- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Customization Notes:**


\_\_\_\_\_

\_\_\_\_\_


\_\_\_\_\_

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

**Dimensions & Mounting** (measurements in inches; drawings are not to scale)

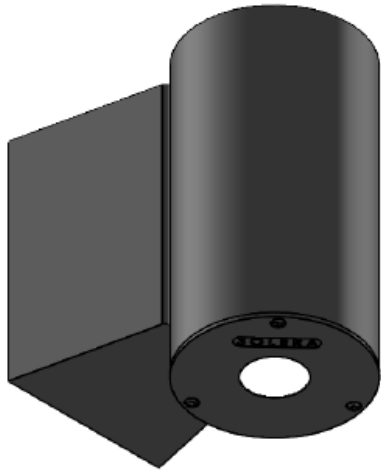

**SRBK5**

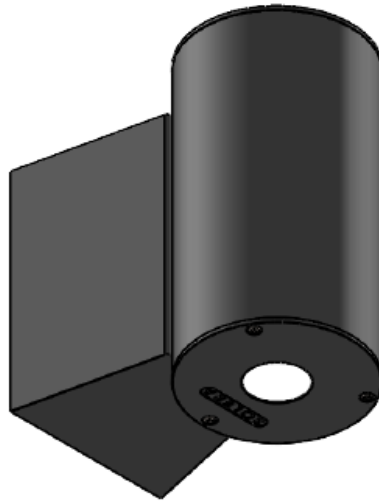

**2SRBK5**

