



| |
|--------------|
| Date |
| Quote # |
| Project Name |
| Type |



SSQB - Bollard

Description:

Fabricated aluminum housing with 4 extruding bars, bars are separated by 90 degree angles. Clear glass lens is standard. All external hardware is stainless steel.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

| Name | Light Engine | Source Lumens(LED) | Color Temp | Electrical |
|------|---------------|--------------------|------------|--------------|
| SSQB | 20W LED (Max) | 2814 | 3000K | UNV 120-277V |
| | | | 3500K | HLV 347-480V |
| | | | 4000K | |
| | | | 5000K | |

Contact for custom Contact for custom Contact for custom

| Mounting | | Lens | | Light Pattern | Options | | Finishes | |
|----------|--------------------------|------|--------------------------|---------------|---------|-------------------------|--|--------------|
| ABT | Anchor, bolts & template | CPL | Clear polycarbonate lens | Type V (Std) | MS | Motion sensor | Standard | |
| | | | | | SD | Step dimming | BL | Black |
| | | | | | TP | Tamperproof hardware | WH | White |
| | | | | | TS | Tamperproof screws | SG | Silver Grey |
| | | | | | PC | Button photocell | BZ | Bronze |
| | | | | | | | Custom | |
| | | | | | GFR | Ground fault receptacle | CC | Custom Color |
| | | | | | SF | Single fuse | See website for custom colors. Contact factory for physical samples. | |



- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

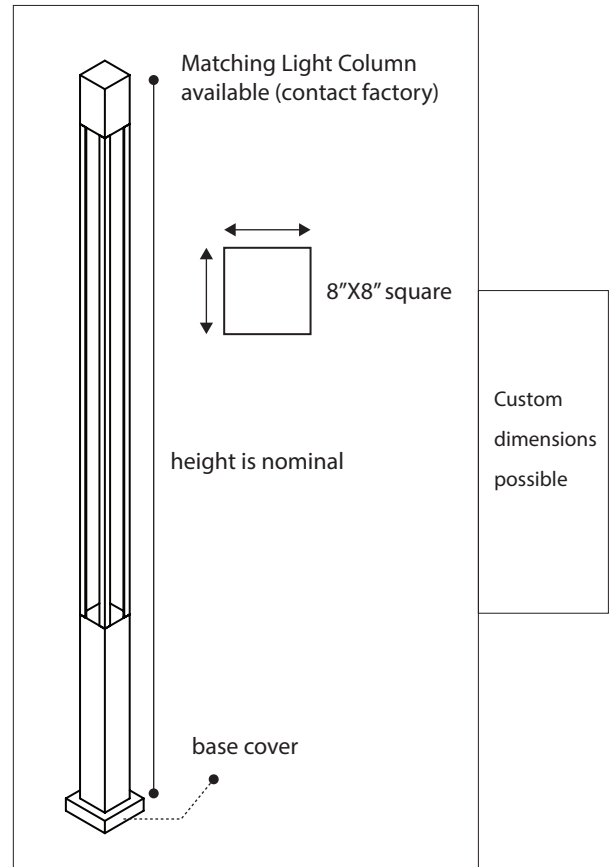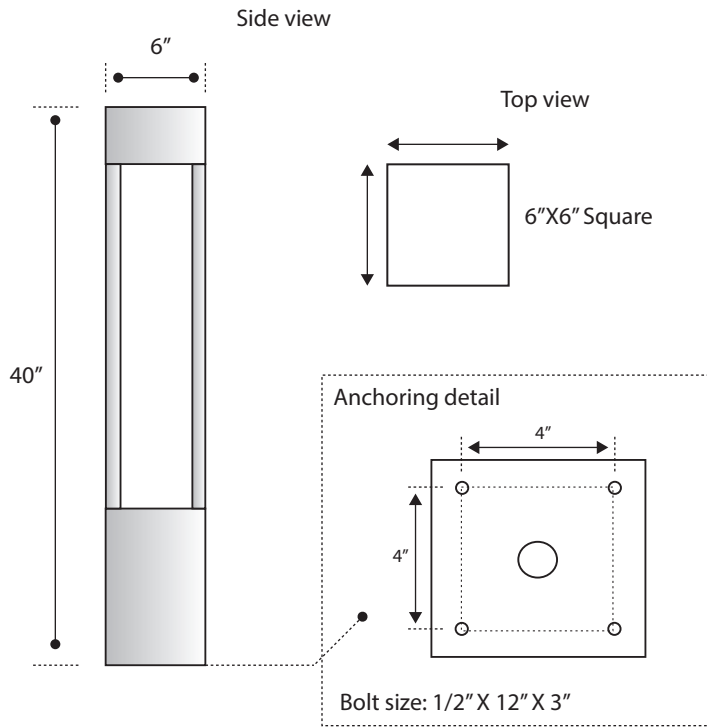

Listing:

Complies to CSA and UL standards.

Polar Graph:

