

Date: _____

Type: _____

Project: _____

TELESCOPE WALL MOUNT

TELESCOPE is a compact conical wall mount that features a slim, solid, smooth aluminum shade with distinct bottom circular optical opening cleanly lined with flat lens giving direct downward illumination. This is dark-sky compliant and available in three sizes. The 3" projection at the bottom also makes it an ADA-compliant luminaire.

Construction: Carefully crafted using aluminum alloy seamlessly finished showing smooth surface. Its stainless-steel external hardware and all-weather silicon gasket seal ensures corrosion resistance and durability to guarantee long-lasting performance.

Mounting: Fixture is suitable to mount over a 2x4 inch J-box.

Lens: clear flat

Downlight distribution: wide beam (std), medium beam, narrow beam

Lamp: High power LEDs with 50,000 hrs. rated lamp life L70% lumen maintenance 3000K, 3500K, 4000K, 5000K color temperature CRI 80

Driver: 60Hz, 120-277V electronic LED driver, thermally protected with low THD. 6kV native surge protection and 4kV EFT with ambient operating temperature -40°C to 55°C.

Options: tamperproof hardware, tamperproof bits, wet location, 0-10v dimming


Finish: black, white, silver grey, bronze, custom color available upon request, hydro-dipped finish

Listing: complies with CSA & UL standards; label for outdoor location and dark-sky compliant

Warranty: 5-year limited warranty



TELESCOPE:

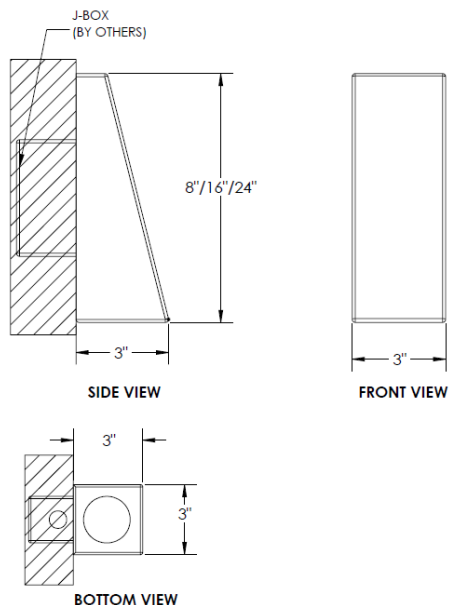



CUSTOM ARCHITECTURAL LIGHTING

Toll free: 1 877 765 3722

• 120 Walker Dr, Brampton, ON L6T 4G9 CANADA

Fax: 905 457 1115

soleracorp.com

--	--	--	--	--	--	--	--	--	--

Name	Height (inches)	Light Engine (maximum)	Color Temperature	Electrical	Mounting	Lens	Down Light Pattern	Options	Finish
TELESCOPE	8	7W LED	3000K	UNV	WM	CPL	WB	TP	BL
	16	15W LED	3500K				MB	TS	BZ
	24	23W LED	4000K				NB	WL	WH
			5000K					DM	SG
		custom wattage available							CC
									H-DIP

Notes:

- 3000K – 141 lm/w
- 3500K – 144 lm/w
- 4000K – 147 lm/w
- 5000K – 149 lm/w
- UNV – Universal voltage (120-277V)
- WM – Wall mount
- CPL – Flat clear lens
- WB – Wide beam downlight distribution (std)
- MB – Medium beam downlight distribution
- NB – Narrow beam downlight distribution
- TP – Tamperproof hardware
- TS – Tamperproof bits
- WL – Wet location
- DM – 0-10v dimming
- BL – Minitex black
- BZ – Minitex bronze
- WH – Minitex white
- SG – Minitex silver gray
- CC – Custom color (confirm RAL No. prior to production)
- H-DIP – Hydro-dipped finish (contact factory for pattern design options)