

Date:

Type:

Project:



TELS WALL MOUNT

A decorative surface luminaire made of aluminum extrusion with front design. Choose from different patterns to give a unique look. The standard offering is the slit design with front glow. Up & down lights are options. Available in 3 sizes.

Name	Size	Light Engine	Lumens*	Color Temp	Electrical	Mounting
TELS	24	20W LED	3520	3000K	UNV 120-277V	WM Wall mounted
	36	30W LED	5280	3500K	HLV 347-480V	
	48	42W LED	7392	4000K 5000K		
Contact for other sizes		Contact for other wattages & outputs				

Lens	Light Distribution	Options	Finishes
OAL Opal lens (Std)	F Front glow (Std)	RGBW Programmable colored LED	BL Black
		TP/TS Tamperproof hardware & screws	WH White
	NB Narrow Beam Distribution, for U/D only	WL Wet location	SG Silver Grey
	MB Medium Beam Distribution, for U/D only	CP Custom patterns (see next page for options)	BZ Bronze
	WB Wide Beam Distribution, for U/D only	SS Stainless steel construction	CC Custom Color
		U/D 20W Up light only or 20W Down light only or both Up & Down lights	

[See finishes info on website](#)



*General lumens are based on Wattage and 5000K CCT
 *Specific IES Files available upon request
 Std – Standard Offering

TELS- _____



Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.


Dimensions & Mounting (measurements in inches; drawings are not to scale)

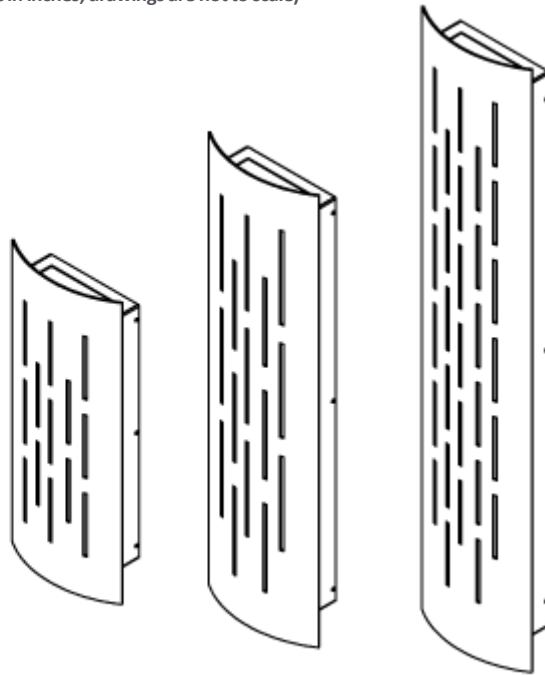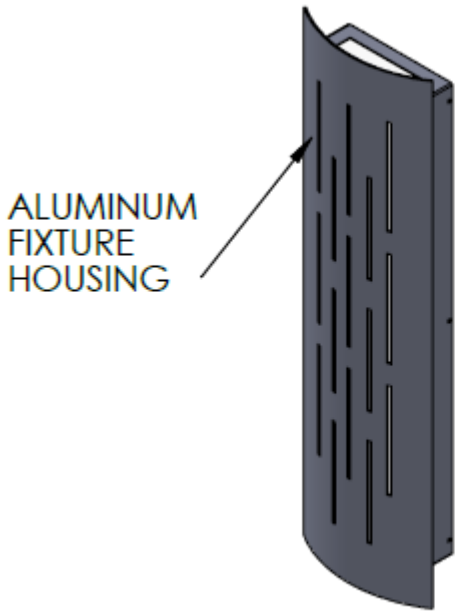

TELS-24" TELS-36" TELS-48"

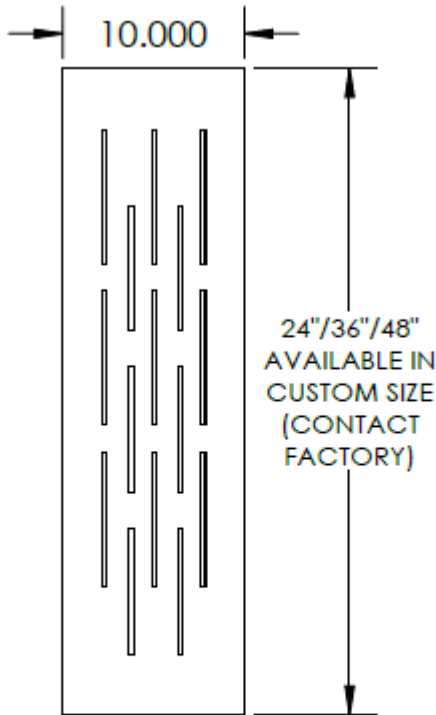
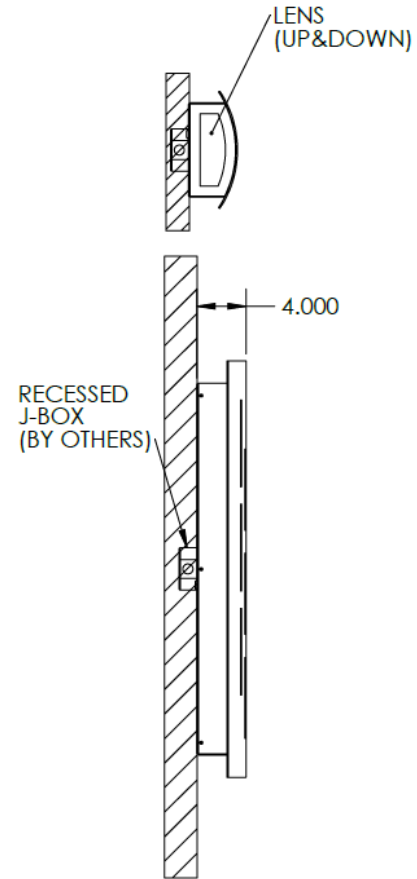


MOUNTING DETAILS:

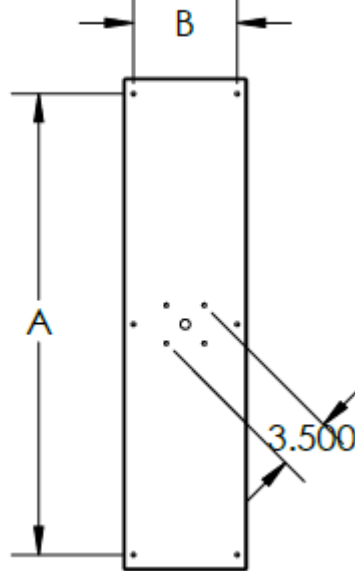

PATTERN A

PATTERN B

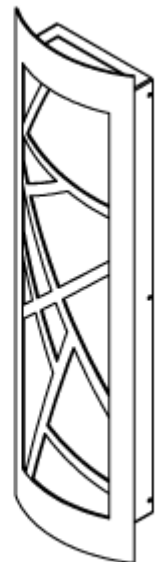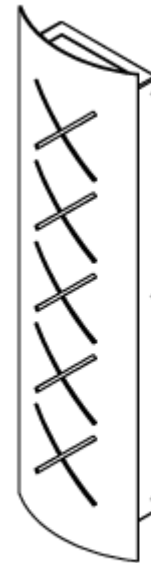

**CUSTOM PATTERNS AVAILABLE
CONTACT FACTORY**

PRODUCT	DIM "A"	DIM "B"
24" TELS	18"	6.75"
36" TELS	30"	6.75"
48" TELS	40"	6.75"