


Date: _____

Type: _____

Project: _____

TIC-TAC-TOE
INDOOR WALL MOUNT

A wall mounted luminaire with square cut aluminum overlay on white opal acrylic lens. The fixture is standard at 4" depth with up, down, & front illuminations. Lens colors at the front portion are customizable.

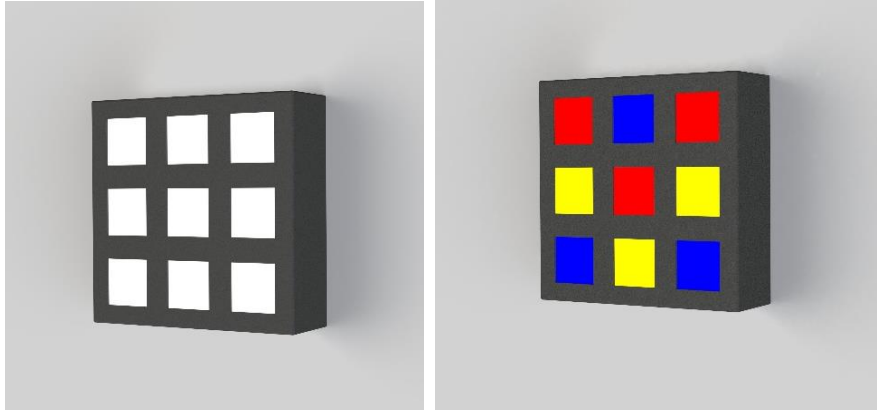

Name	Lamping		Lumens*	Color Temp	Electrical		Mounting	
TIC-TAC-TOE-12	12"	18W LED	3168	3000K	UNV	120-277V	WM	Wall mounted
TIC-TAC-TOE-16	16"	36W LED	6336	4000K 5000K	HLV	347-480V		

Contact for other wattages & lumen outputs

	Lens	Light Pattern	Options	Finishes
OAL	Opal acrylic Lens for up, down, & front light (Std)	U/D Up & down light with front glow (Std)	TP Tamperproof Hardware	BL Black
RL	Red lens, for front portion	U Up light only with front glow	TS Tamperproof Screwdriver	WH White
BL	Blue lens, for front portion	D Down light only with front glow	DM 0-10V Dimming	SG Silver Grey
GL	Green lens, for front portion		WL Wet location	BZ Bronze
YL	Yellow lens, for front portion			CC Custom Color

Contact for combinable & interchangeable lens colors [See finishes info on website](#)




*General lumens are based on maximum wattage and 5000K color temperature
 *IES Files available upon request
 Std – Standard Offering

TIC-TAC-TOE- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____

Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (measurements in inches; drawings are not to scale)

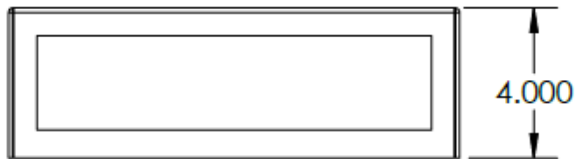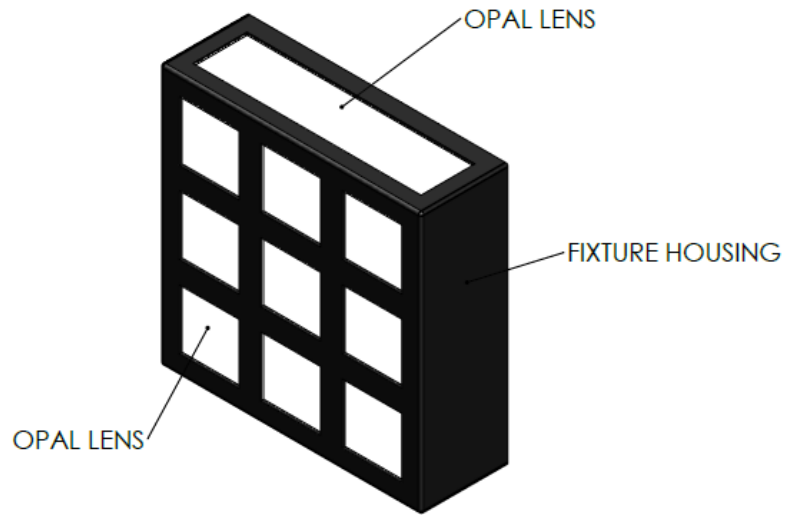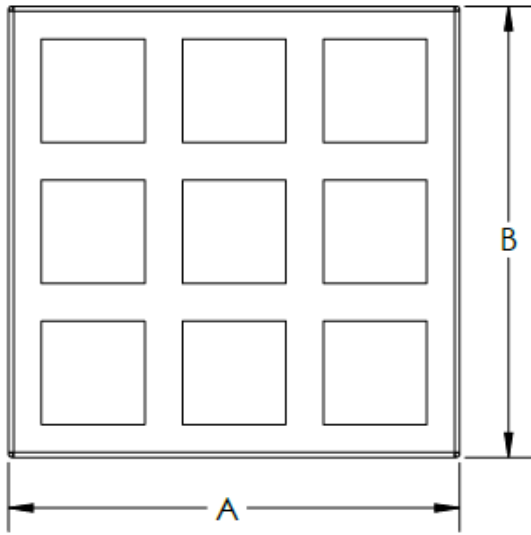

PRODUCT	DIM "A"	DIM "B"	DIM "C"
TTT-12	12.000	12.000	4.000
TTT-16	16.000	16.000	4.000