

Date: \_\_\_\_\_


Type: \_\_\_\_\_

Project: \_\_\_\_\_

## TIC-TAC-TOE

### INDOOR WALL MOUNT

A wall mounted luminaire with square cut aluminum overlay on white opal acrylic lens. The fixture is standard at 4" depth with up, down, & front illuminations. Lens colors at the front portion are customizable.

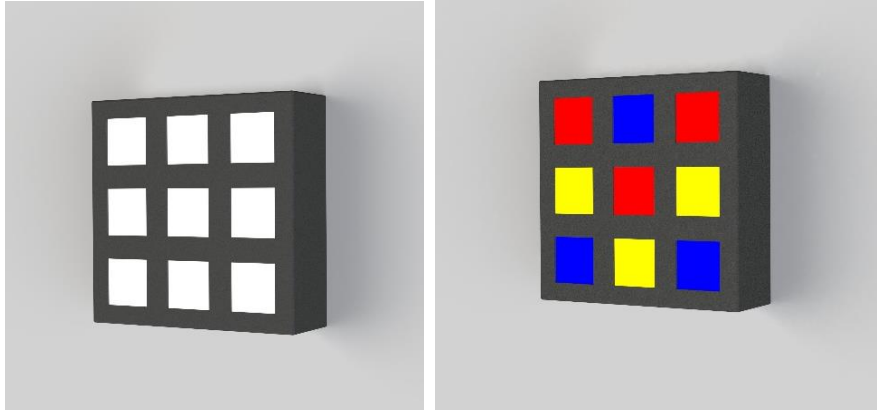

Name	Lamping	Lumens*	Color Temp	Electrical	Mounting
TIC-TAC-TOE-12	12" 18W LED	3168	3000K	UNV 120-277V	WM Wall mounted
TIC-TAC-TOE-16	16" 36W LED	6336	4000K 5000K	HLV 347-480V	

Contact for other wattages & lumen outputs

Lens	Light Pattern	Options	Finishes
OAL Opal acrylic Lens for up, down, & front light (Std)	U/D Up & down light with front glow (Std)	TP Tamperproof Hardware	BL Black
RL Red lens, for front portion	U Up light only with front glow	TS Tamperproof Screwdriver	WH White
BL Blue lens, for front portion	D Down light only with front glow	DM 0-10V Dimming	SG Silver Grey
GL Green lens, for front portion		WL Wet location	BZ Bronze
YL Yellow lens, for front portion			CC Custom Color

Contact for combinable & interchangeable lens colors [See finishes info on website](#)

\*General lumens are based on maximum wattage and 5000K color temperature  
 \*IES Files available upon request  
 Std – Standard Offering

TIC-TAC-TOE- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

**Customization Notes:**

---






---



---

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

**Dimensions & Mounting** (measurements in inches; drawings are not to scale)

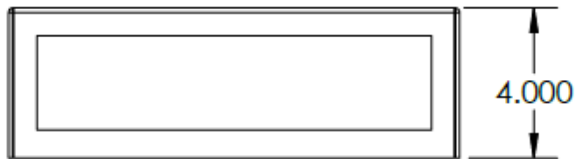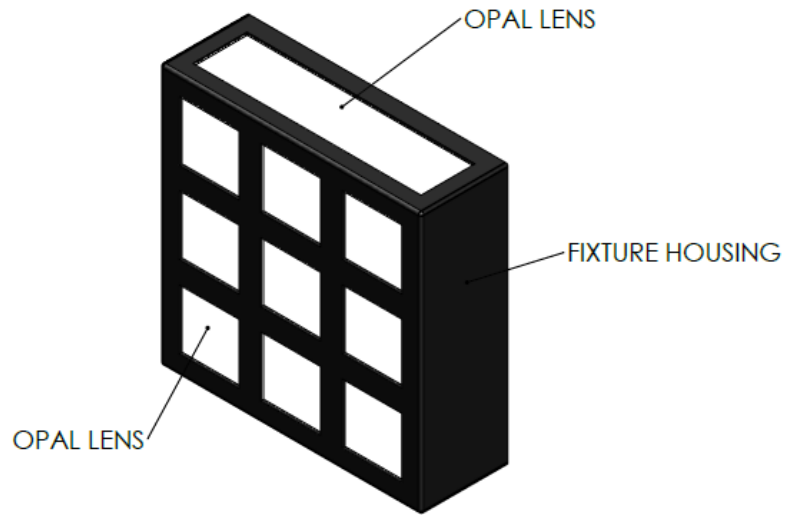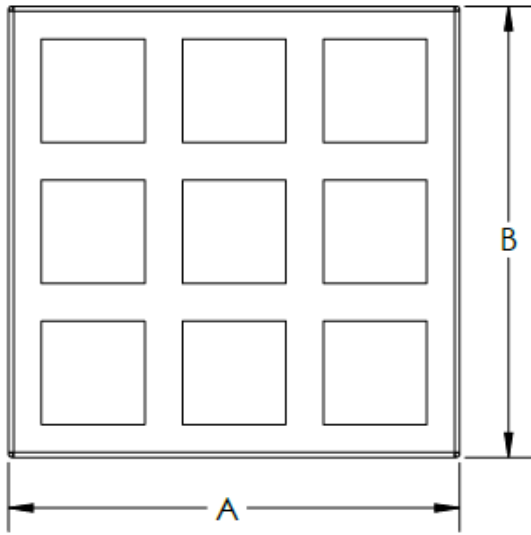

PRODUCT	DIM "A"	DIM "B"	DIM "C"
TTT-12	12.000	12.000	4.000
TTT-16	16.000	16.000	4.000