



Date
Quote #
Project Name
Type



TIKO - Light Column

Description:

Triangular light column constructed of heavy duty extruded aluminum housing construction. Opal acrylic lenses are standard.

Name - Engine - Lumens - CCT - Electrical - Mounting - Lens - Pattern - Options - Finish

Name	Light Engine	Source Lumens _{(LED)(5000K)}	Color Temp	Electrical
TIKO	60 LED (Max)	10559	3000K	UNV 120-277V
			3500K	HLV 347-480V
			4000K	
			5000K	

Contact for custom

Contact for custom

Contact for custom

Mounting	Lens	Light Pattern	Options	Finishes
ABT Anchor, bolts and template	OAL Opal acrylic lens	TY5 Type V (Std)	MS Motion sensor (ON-OFF)	Standard
			TCO Trespass cut off	BL Black
			EM Emergency battery	WH White
			TP Tamperproof hardware	SG Silver Grey
			TS Tamperproof screws	BZ Bronze
			PC Button photocell	Custom
			GFR Ground fault receptacle	CC Custom Color
			COM Intercom	See website for custom colors. Contact factory for physical samples.
			SF Single fuse	


- Lumens are based on max wattage & 5000K CCT
- IES files available upon request
- Std - Standard Offering





Dimensions & Mounting:

Please note that drawings are not to scale.

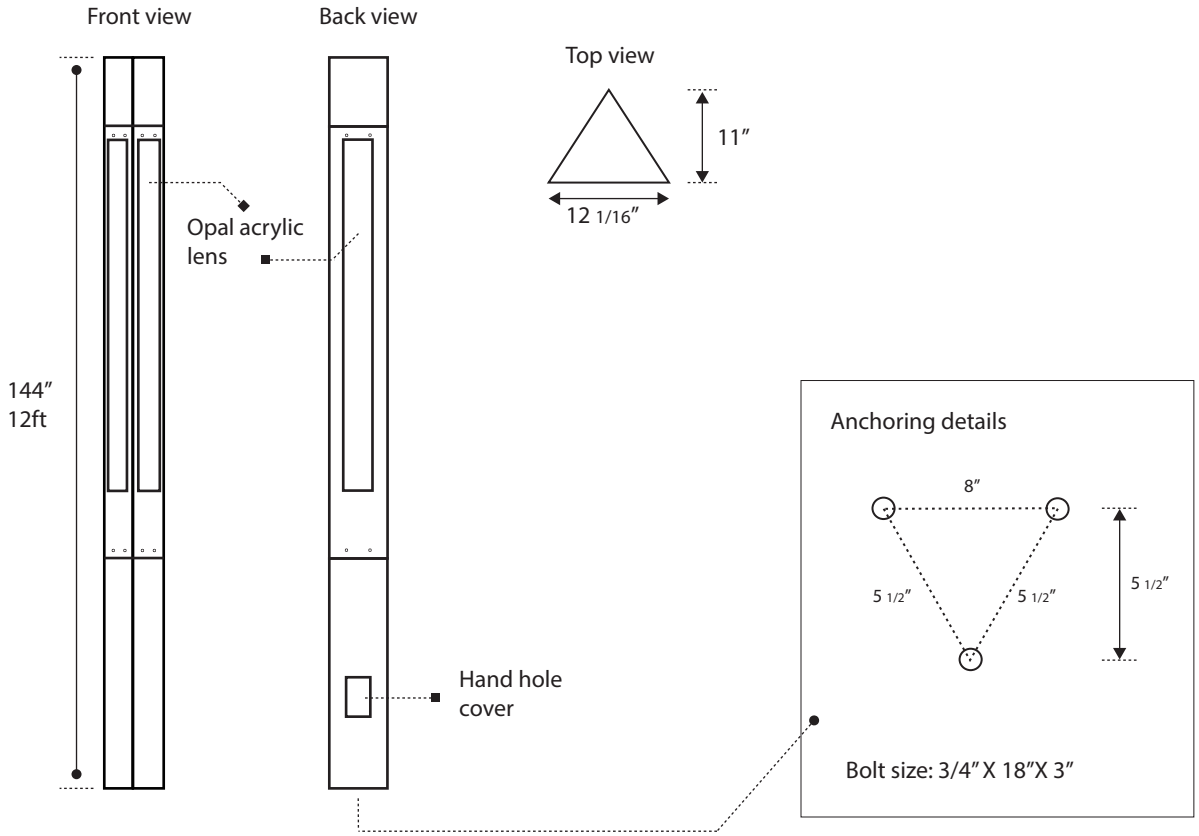

Listing:

Complies to CSA and UL standards.

Polar Graph:

