

Date:

Type:

Project:



TOWER LIGHT COLUMN

Heavy duty extruded aluminum housing construction with opal acrylic lens. Standard height is 20ft x 10" square. Custom lens sizes, block lengths, & cut-off available.

Name	Lamping	Lumens*	Color Temp	Electrical		Mounting	
TOWER	336 W LED	52,416 lumens	3000K	UNV	120-277V	ABT	Anchors, Bolts & Template
		55,104 lumens	4000K	HLV	347-480V		
		55,775 lumens	5000K				
	Contact for other wattages	Contact for other lumens	RGBW				
			Specify other				

Lens		Light Pattern		Options		Finishes	
OAL	Opal Acrylic Lens (Std)	TY5	Type V (Std)	TP	Tamperproof Hardware	BL	Black
Contact for other lengths				TS	Tamperproof Screws	WH	White
				PC	Button Photocell, voltage specific	SG	Silver Grey
				SF	Single Fuse	BZ	Bronze
				GFR	Ground Fault Receptacle	CC	Custom Color
				DM	0-10V Dimming	See finishes info on website	
				COM	Intercom		
				BLK	10" X 18" block, 5ft max, will reduce wattage		
				ST	Steplight, 10W LED		
				Contact for other options			


*Lumens are based on Wattage & CCT for lamping
Std – Standard Offering

TOWER- _____ - _____ - _____ - _____ - _____ - _____ - _____ - _____


Customization Notes:

▶▶▶ Info on this spec sheet will change without notice as product development is an ongoing process.

Dimensions & Mounting (drawings are not to scale)

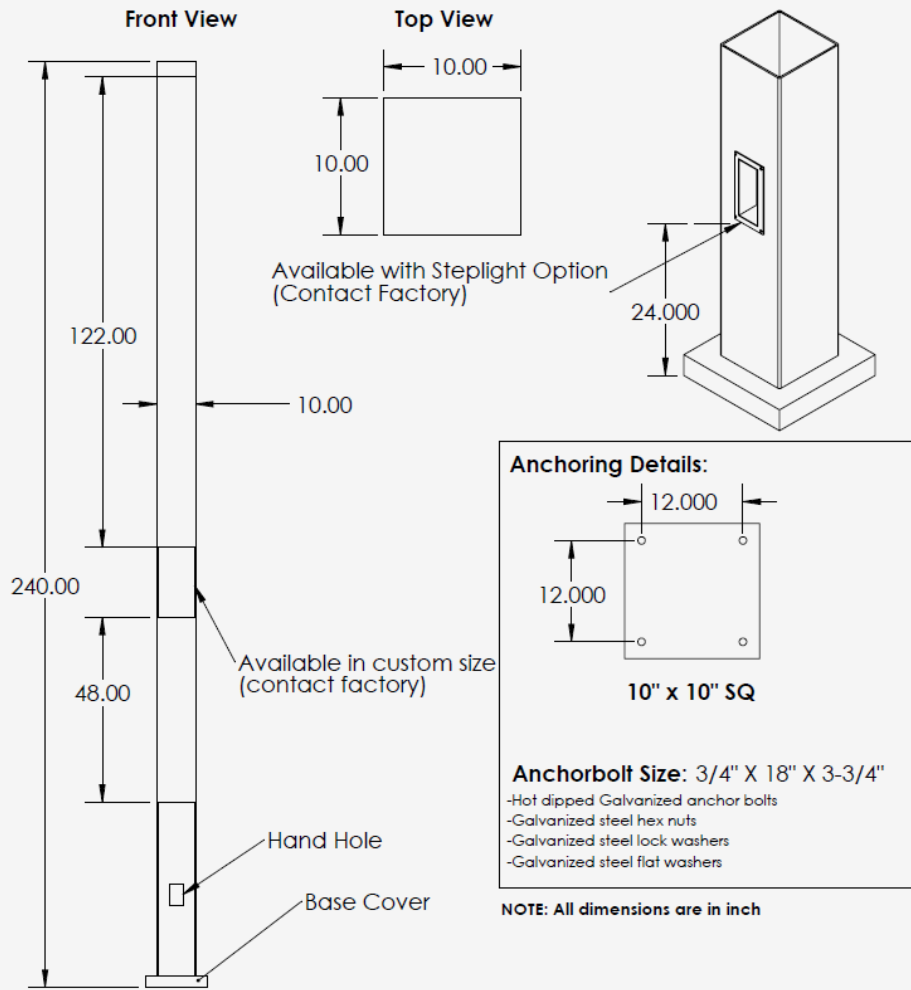

Polar Graph

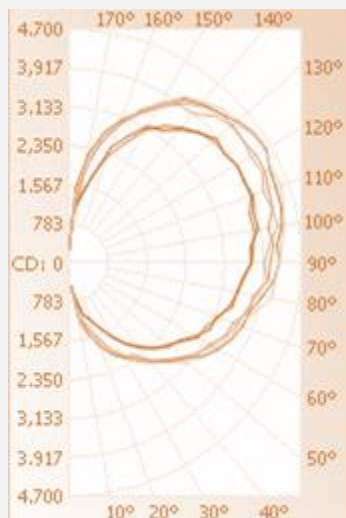

Type V